


1.5A Sintered Glass Passivated Rectifier (SGP[®])

Features

- Sintered glass passivated (SGP[®]) rectifier chip
- Capable of meeting environmental standards of MIL-S-19500
- 1.5A operation at $T_A=55^\circ\text{C}$ with no thermal runaway
- High temperature soldering guaranteed: $260^\circ\text{C}/10$ seconds
/.0375" (9.5mm) lead length, 5lbs (2.3kg) tension
- RoHS Compliance



**DO-15
(DO-204AC)**



Mechanical Data

Case:	JEDEC DO-204AC(DO-15) molded plastic body
Epoxy:	Plastic package has UL flammability classification 94V-0
Terminals:	Plated axial leads, solderable per MIL-STD-750, Method 2026
Polarity:	Color band denotes cathode end
Weight:	0.015 ounces, 0.4 gram

Maximum Ratings and Electrical Characteristics ($T_A=25^\circ\text{C}$ unless noted otherwise)

Symbol	Description	GP15A	GP15B	GP15D	GP15G	GP15J	GP15K	GP15M	Unit	Conditions
V_{RRM}	Maximum Repetitive Peak Reverse Voltage	50	100	200	400	600	800	1000	V	
V_{RMS}	Maximum RMS Voltage	35	70	140	280	420	560	700	V	
V_{DC}	Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	V	
I_{F(AV)}	Maximum Average Forward Rectified Current	1.5							A	0.375" (9.5mm) lead length(Fig.1)
I_{FSM}	Peak Forward Surge Current	50							A	8.3ms single half sine-wave superimposed on rated load (JEDEC Method)



1.5A Sintered Glass Passivated Rectifier (SGP[®])

GP15A - GP15M

Symbol	Description	GP15A	GP15B	GP15D	GP15G	GP15J	GP15K	GP15M	Unit	Conditions
V_F	Maximum Instantaneous Forward Voltage	1.1							V	IF=1.5 A
I_R	Maximum DC Reverse Current at Rated DC Blocking Voltage	5							μA	TA=25° C
		50								TA=125° C
		100								TA=150° C
C_J	Typical Junction Capacitance	20							pF	VR=4V, f=1MHz
R_{thJA} R_{thJL}	Typical Thermal Resistance	45 20							°C / W	Note
T_J	Operating Temperature range	-65 to +175							°C	
T_{STG}	Storage Temperature Range	-65 to +175								

Note: Thermal resistance from junction to ambient at 0.375" (9.5mm) lead lengths, P.C.B mounted.

Typical Characteristics Curves

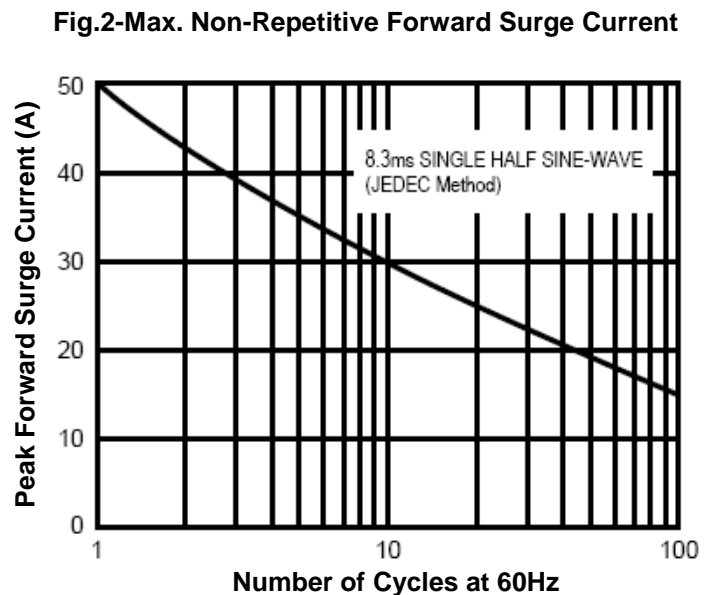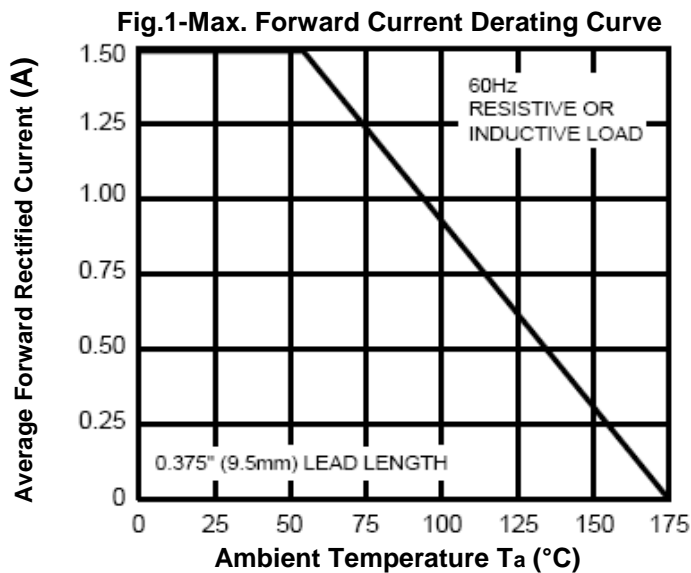

1.5A Sintered Glass Passivated Rectifier (SGP[®])

GP15A - GP15M

Fig.3- Typical Forward Characteristics

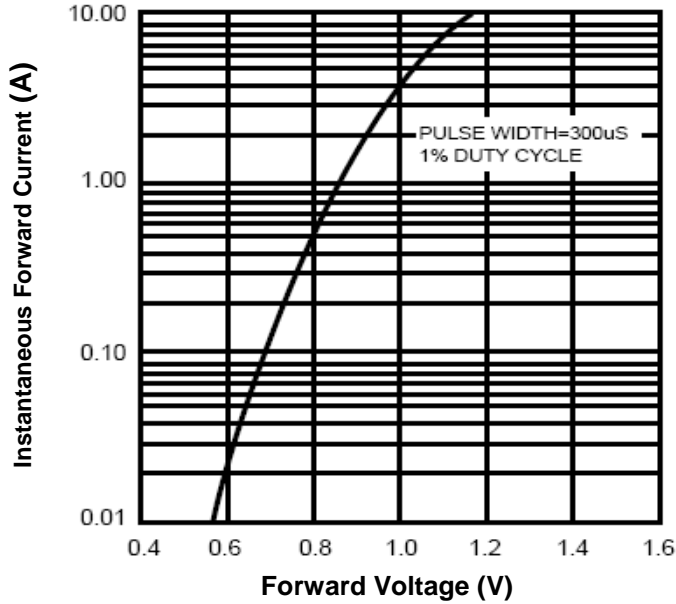


Fig.4-Typical Reverse Characteristics


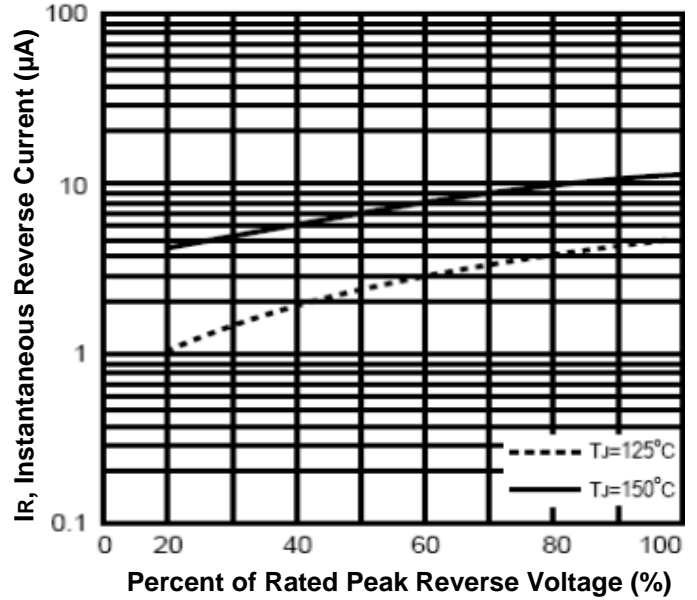



Fig.5- Typical Junction Capacitance

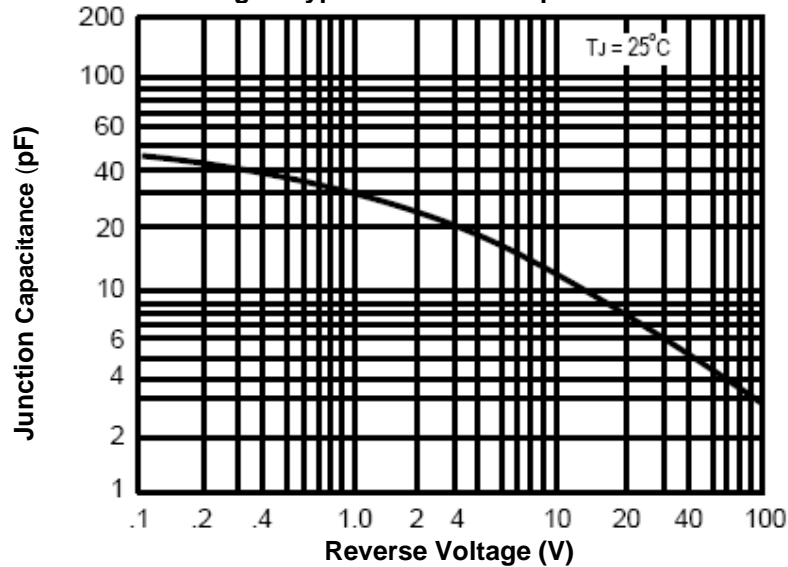

1.5A Sintered Glass Passivated Rectifier (SGP[®])

GP15A - GP15M

Dimensions in inches (mm)

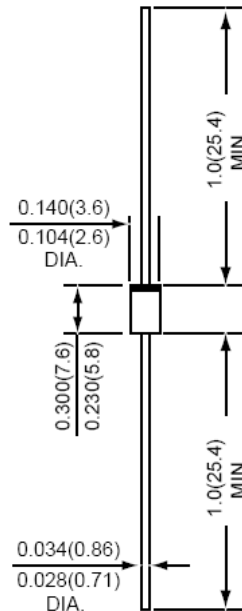

**DO-15
(DO-204AC)**

How to contact us

USA HEADQUARTERS

28040 WEST HARRISON PARKWAY, VALENCIA, CA 91355-4162

Tel: (800)-TAITRON (800)-824-8766 (661)-257-6060

Fax: (800)-TAITFAX (800)-824-8329 (661)-257-6415

Email: taitron@taitroncomponents.com

Http://www.taitroncomponents.com

TAITRON COMPONENTS INCORPORATED TAIWAN BRANCH

6F., NO.190, SEC. 2, ZHONGXING RD., XINDIAN DIST., NEW TAIPEI CITY 23146, TAIWAN R.O.C.

Tel: 886-2-2913-6238

Fax: 886-2-2913-6239

TAITRON COMPONENT TECHNOLOG SHANGHAI CORPORATION

SUITE 1503, METROBANK PLAZA, 1160 WEST YAN'AN ROAD, SHANGHAI, 200052, CHINA

Tel: +86-21-5424-9942

Fax: +86-21-2302-5027