


50A Single-Phase in-line Bridge Rectifier

Features

- Low Forward Voltage Drop
- High Current Capability, High Reliability
- High Surge Current Capability
- Designed for Saving Mounting Space

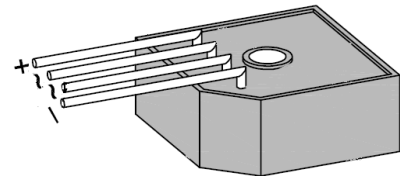

KBPCS
(Plastic Case with Metal Heat Sink)

Mechanical Data

Case:	KBPCS, molded plastic with heatsink internally mounted in the bridge encapsulation
Terminals:	Plated leads solderable per MIL-STD-202, method 208
Polarity:	As marked on body
Mounting:	Through hole with #10 screw
Mounting Torque:	23 cm-kg (20 in-lbs) Max.
Weight:	21grams

Maximum Ratings And Electrical Characteristics (T_{amb}=25°C)

Symbol	Description	KBPC50-005S	KBPC50-01S	KBPC50-02S	KBPC50-04S	KBPC50-06S	KBPC50-08S	KBPC50-10S	Unit	Conditions
VRRM	Max. Repetitive Peak Reverse Voltage	50	100	200	400	600	800	1000	V	
VRMS	Max. RMS Voltage	35	70	140	280	420	560	700	V	
VDC	Max. DC blocking voltage	50	100	200	400	600	800	1000	V	
I_o	Average Rectified Output Current	50							A	T _A =60°C
I_{FSM}	Non-Repetitive Peak Forward Surge Current	450							A	8.3ms single half sine-wave superimposed on rated load (JEDEC method)

50A Single-Phase in-line Bridge Rectifier

KBPC50-005S – KBPC50-10S

Symbol	Description	KBPC50-005S	KBPC50-01S	KBPC50-02S	KBPC50-04S	KBPC50-06S	KBPC50-08S	KBPC50-10S	Unit	Conditions
V _{FM}	Forward Voltage per leg	1.1							V	I _o =25A
I _{RM}	Max. Reverse DC Current At Rated DC Blocking Voltage per leg	10							μA	T _C = 25°C
		500							μA	T _C = 125°C
I _t	Rating for Fusing (t<8.3ms)	800							A ² s	
C _J	Typical junction capacitance per leg	400							pF	f=1MHz V _R = 4V
R _{thJC}	Typical Thermal Resistance per leg	1.6							°C / W	Note
V _{iso}	RMS Isolation Voltage from Case to Leads	2500							V	
T _J ,T _{STG}	Operating Junction and Storage Temperature Range	-65 to +150							°C	

Note: Thermal Resistance junction to case, mounted on heatsink.

Typical Characteristics Curves

Fig.1- Forward Current Derating Curve


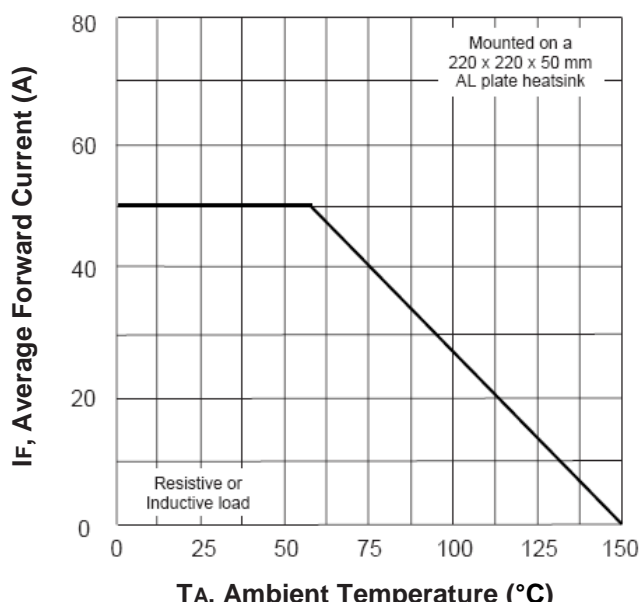


Fig.2-Max. Non-repetitive Peak Forward Surge Current Per Leg

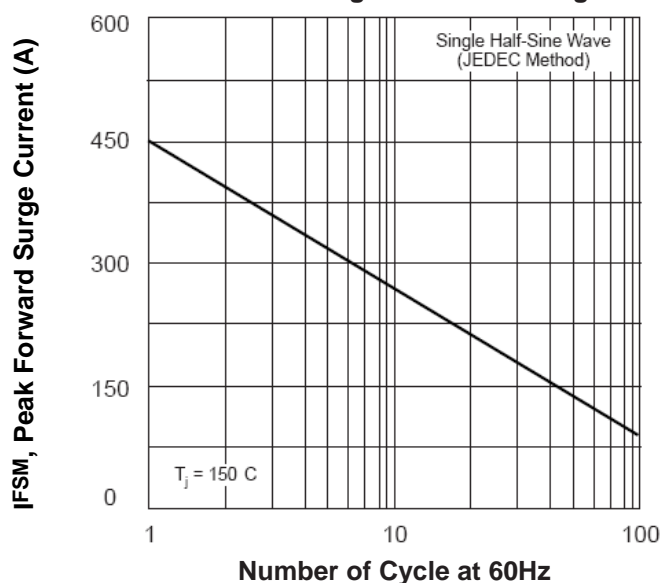

50A Single-Phase in-line Bridge Rectifier

KBPC50-005S – KBPC50-10S

Fig.3-Typical Instantaneous Forward Characteristic Per Leg

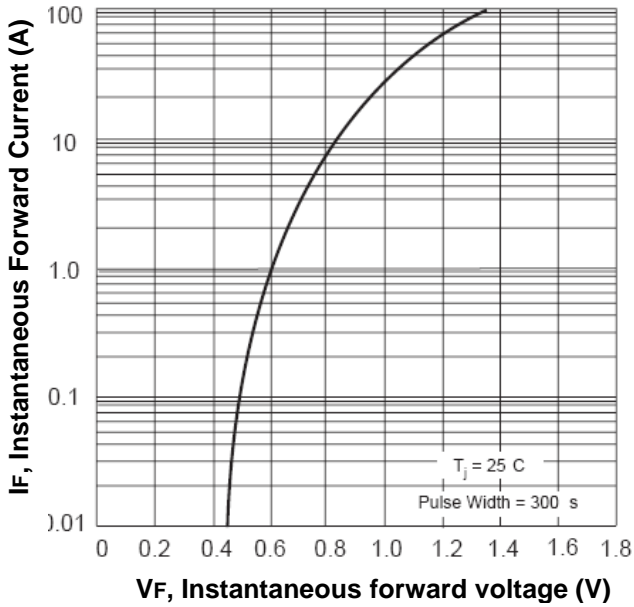


Fig.4-Typical Reverse Characteristics Per Leg


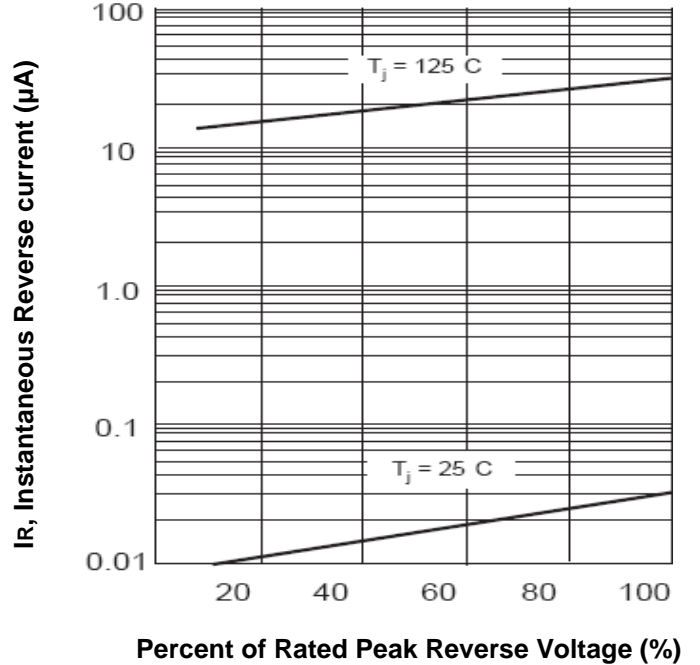



Fig.5-Typical Junction Capacitance Per Leg

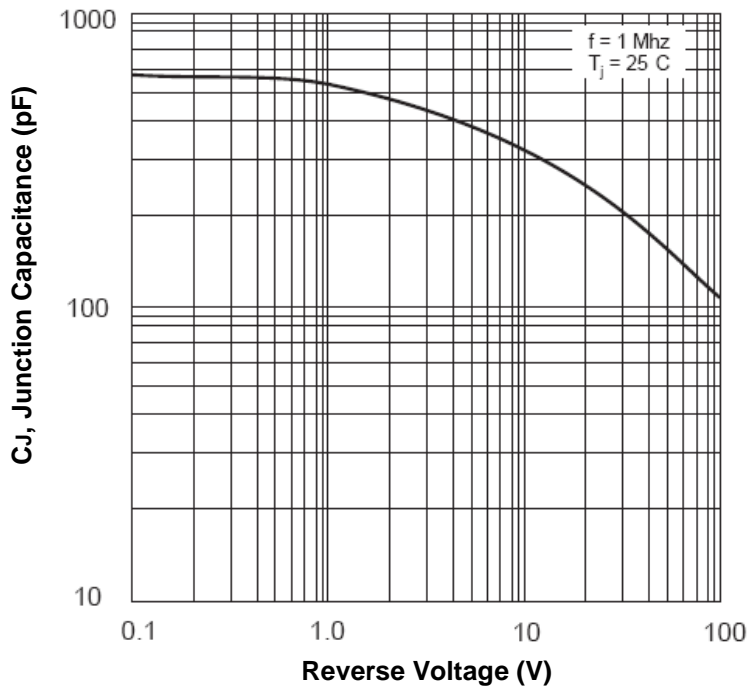

50A Single-Phase in-line Bridge Rectifier

KBPC50-005S – KBPC50-10S

Dimensions in inch (mm)

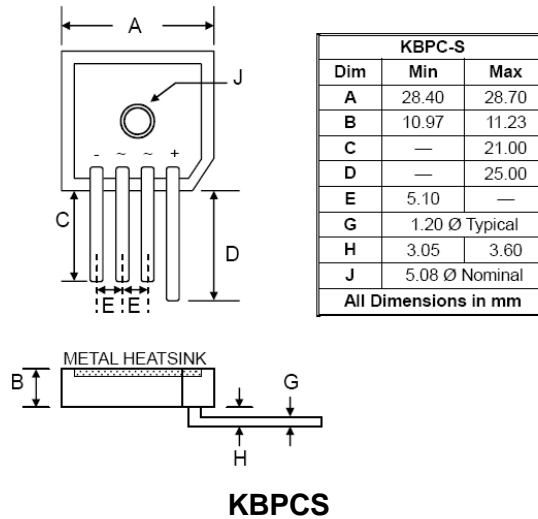

How to contact us

USA HEADQUARTERS

28040 WEST HARRISON PARKWAY, VALENCIA, CA 91355-4162

Tel: (800)-TAITRON (800)-824-8766 (661)-257-6060

Fax: (800)-TAITFAX (800)-824-8329 (661)-257-6415

Email: taitron@taitroncomponents.com

Http://www.taitroncomponents.com

TAITRON COMPONENTS INCORPORATED TAIWAN BRANCH

6F., NO.190, SEC. 2, ZHONGXING RD., XINDIAN DIST., NEW TAIPEI CITY 23146, TAIWAN R.O.C.

Tel: 886-2-2913-6238

Fax: 886-2-2913-6239

TAITRON COMPONENT TECHNOLOG SHANGHAI CORPORATION

SUITE 1503, METROBANK PLAZA, 1160 WEST YAN'AN ROAD, SHANGHAI, 200052, CHINA

Tel: +86-21-5424-9942

Fax: +86-21-2302-5027