


2.5A General Purpose Silicon Rectifier

Features

- Low forward voltage drop
- Low reverse leakage
- High forward surge current capability
- High temperature soldering: 260°C/10 seconds, 0.375" (9.5mm) lead length at 5 lbs (2.3kg) tension
- RoHS Compliance

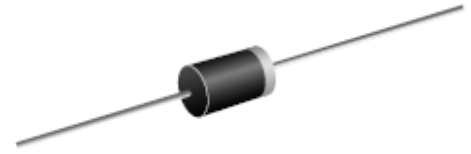

DO-15



Mechanical Data

| | |
|---------------------------|---|
| Case: | DO-15 transfer molded plastic |
| Epoxy: | UL94V-0 rate flame retardant |
| Terminals: | Plated axial lead, solderable per MIL-STD-202E, Method 208C |
| Polarity: | Color band denotes cathode end |
| Mounting Position: | Any |
| Weight: | 0.015 ounce, 0.4 gram |

Maximum Ratings ($T_{Ambient}=25^{\circ}C$ unless noted otherwise)

| Symbol | Description | RL251M | RL252M | RL253M | RL254M | RL255M | RL256M | RL257M | Unit | Conditions |
|---------------------------------------|--|-------------|--------|--------|--------|--------|--------|--------|------|---|
| V_{RRM} | Maximum Repetitive Peak Reverse Voltage | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V | |
| V_{RMS} | Maximum RMS Voltage | 35 | 70 | 140 | 280 | 420 | 560 | 700 | V | |
| V_{DC} | Maximum DC Blocking Voltage | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V | |
| I_{F(AV)} | Maximum Average Forward Rectified Current | 2.5 | | | | | | | A | Note 1 |
| I_{FSM} | Peak Forward Surge Current | 100 | | | | | | | A | 8.3ms single half sine-wave superimposed on rated load (JEDEC method) |
| T_J, T_{STG} | Operating Junction and Storage Temperature Range | -65 to +175 | | | | | | | °C | |

2.5A General Purpose Silicon Rectifier

RL251M - RL257M

Electrical Characteristics ($T_{Ambient}=25^{\circ}C$ unless noted otherwise)

| Symbol | Description | RL251M | RL252M | RL253M | RL254M | RL255M | RL256M | RL257M | Unit | Conditions |
|-----------------|---|--------|--------|--------|--------|--------|--------|--------|---------------|------------------------|
| V_F | Maximum Forward Voltage | 1.0 | | | | | | | V | I_F at 2.5 A |
| I_R | Maximum DC Reverse Current at Rated DC Blocking Voltage | 5.0 | | | | | | | μA | $T_A=25^{\circ}C$ |
| | | 50 | | | | | | | | $T_A=100^{\circ}C$ |
| C_J | Typical Junction Capacitance | 35 | | | | | | | pf | $V_R=4V$, $f=1MHz$ |
| $R_{\theta-JA}$ | Maximum Thermal Resistance | 35 | | | | | | | $^{\circ}C/W$ | Note 2 |

- Note:** 1. 60Hz, resistive or inductive load. Derate current by 20% for capacitive load
2. Thermal resistance from junction to ambient at .375" (9.5mm) lead length.

Typical Characteristics Curves

Fig.1- Forward Current Derating Curve


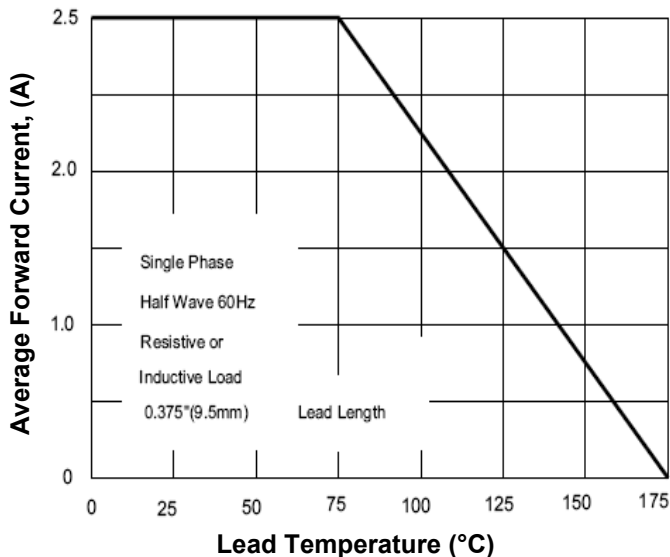


Fig.2- Maximum Non-Repetitive Forward Surge Current

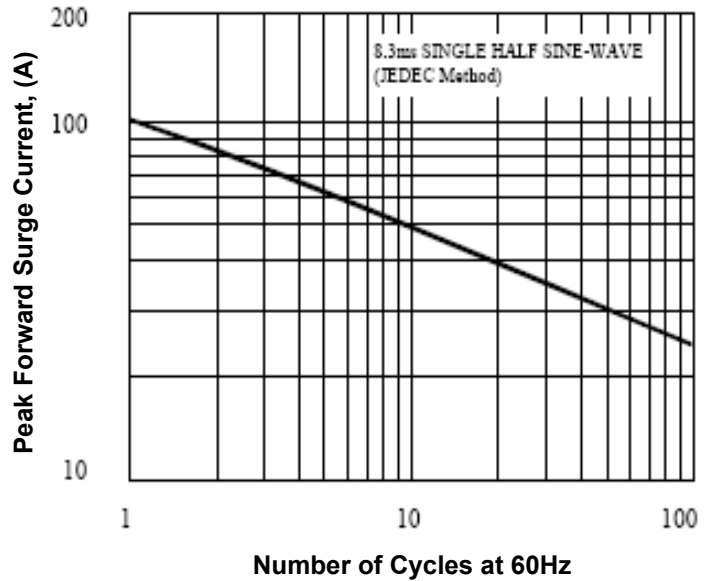

2.5A General Purpose Silicon Rectifier

RL251M - RL257M

Fig.3-Typical Forward Characteristics

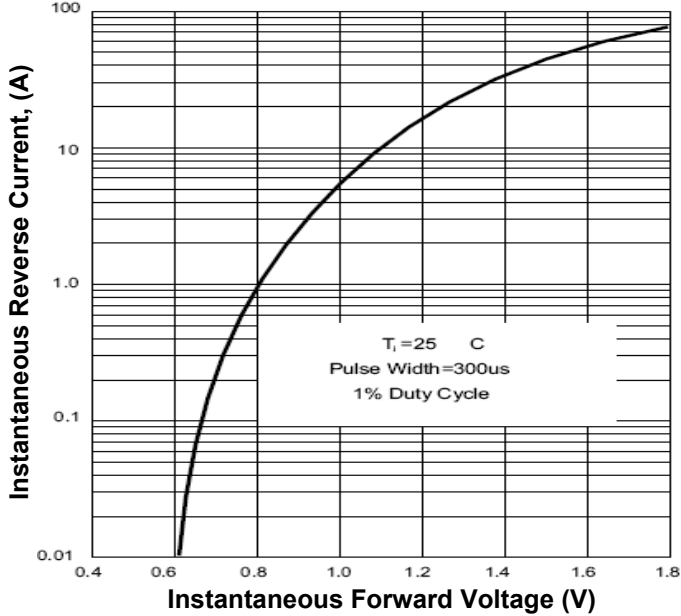


Fig.4- Typical Reverse Characteristics


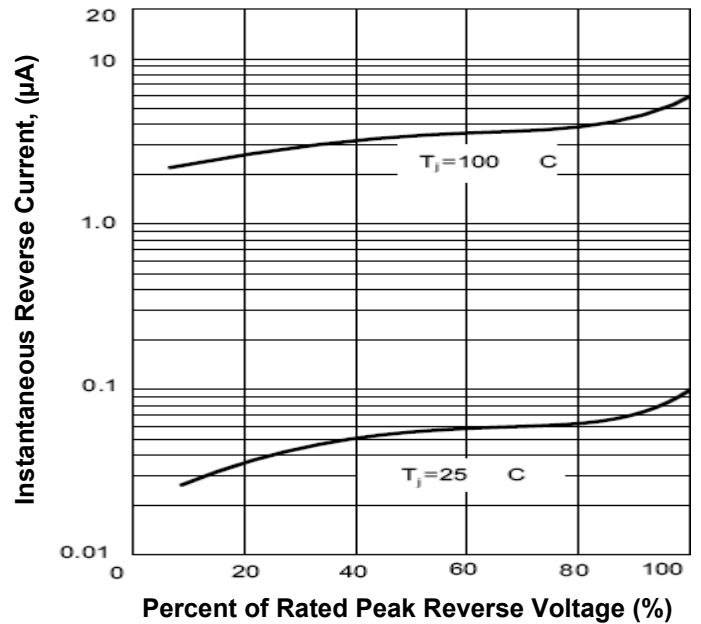



Fig.5-Typical Junction Capacitance

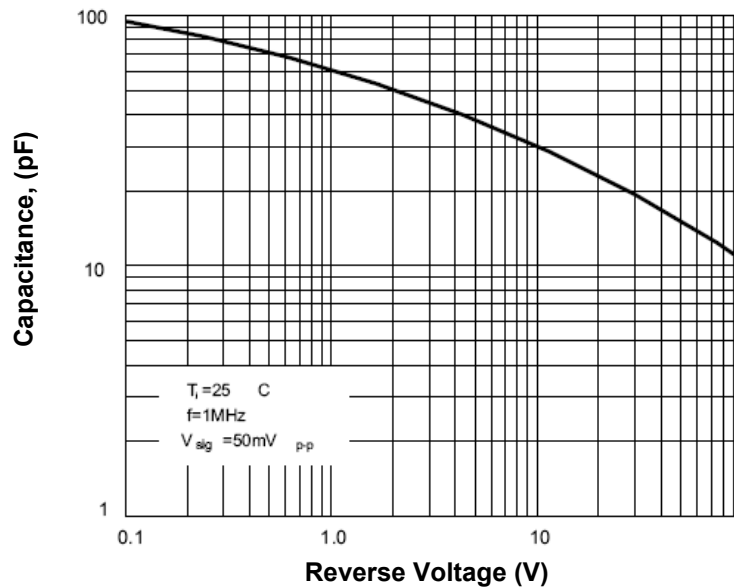

2.5A General Purpose Silicon Rectifier

RL251M - RL257M

Dimensions in inches (mm)

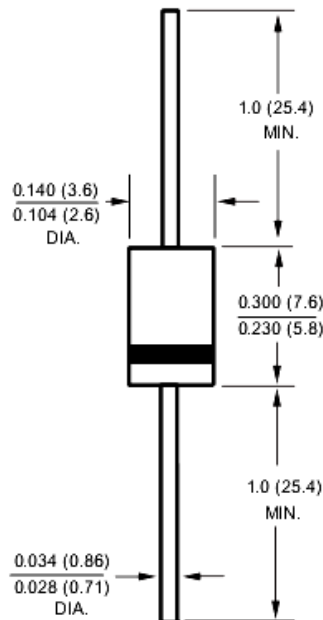

DO-15

How to contact us

USA HEADQUARTERS

28040 WEST HARRISON PARKWAY, VALENCIA, CA 91355-4162

Tel: (800)-TAITRON (800)-824-8766 (661)-257-6060

Fax: (800)-TAITFAX (800)-824-8329 (661)-257-6415

Email: taitron@taitroncomponents.com

Http://www.taitroncomponents.com

TAITRON COMPONENTS INCORPORATED TAIWAN BRANCH

6F., NO.190, SEC. 2, ZHONGXING RD., XINDIAN DIST., NEW TAIPEI CITY 23146, TAIWAN R.O.C.

Tel: 886-2-2913-6238

Fax: 886-2-2913-6239

TAITRON COMPONENT TECHNOLOG SHANGHAI CORPORATION

SUITE 1503, METROBANK PLAZA, 1160 WEST YAN'AN ROAD, SHANGHAI, 200052, CHINA

Tel: +86-21-5424-9942

Fax: +86-21-2302-5027