


1.0A Surface Mount Rectifier

Features

- Glass passivated junction
- Plastic package has underwriters laboratory flammability classification 94 V-0
- High temperature soldering: 250 °C / 10 seconds at terminals
- RoHS compliant



SMB
(DO-214AA)



Mechanical Data

Case:	JEDEC DO-214AA molded plastic
Terminals:	Solder plated solderable per MIL-STD-750, Method 2026
Polarity:	cathode end indicated by color band
Weight:	0.003 Ounce, 0.093 gram

Maximum Ratings ($T_{Ambient}=25^{\circ}C$ unless noted)

Symbol	Description	S1AB	S1BB	S1DB	S1GB	S1JB	S1KB	S1MB	Unit	Conditions	
VRRM	Maximum Repetitive Peak Reverse Voltage	50	100	200	400	600	800	1000	V		
VRMS	Maximum RMS Voltage	35	70	140	280	420	560	700	V		
VDC	Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	V		
IF(AV)	Maximum Average Forward Rectified Current @TL=110°C	1.0								A	
IFSM	Peak Forward Surge Current	30								A	8.3ms single half sine-wave superimposed on rated load (JEDEC method)
IR	Maximum DC Reverse Current at Rated DC Blocking Voltage	1							μA	TA=25 °C	
		50								TA=125 °C	
TJ,TSTG	Operating Junction and Storage Temperature Range	-55 to 150								°C	





1.0A Surface Mount Rectifier

S1AB - S1MB

Electrical Characteristics ($T_{Ambient}=25^{\circ}C$ unless noted)

Symbol	Description	S1AB	S1BB	S1DB	S1GB	S1JB	S1KB	S1MB	Unit	Conditions
V_F	Maximum Instantaneous Forward Voltage	1.1							V	I_F at 1.0 A
C_J	Typical Junction Capacitance	12							pf	Measured at 1.0 MHz and Applied $V_r = 4.0$ volts.
$R_{\theta-JL}$	Maximum Thermal Resistance	30							$^{\circ}C/W$	Mounted on 0.27" x 0.27" (7mmx7mm) copper pad area


Typical Characteristics Curves

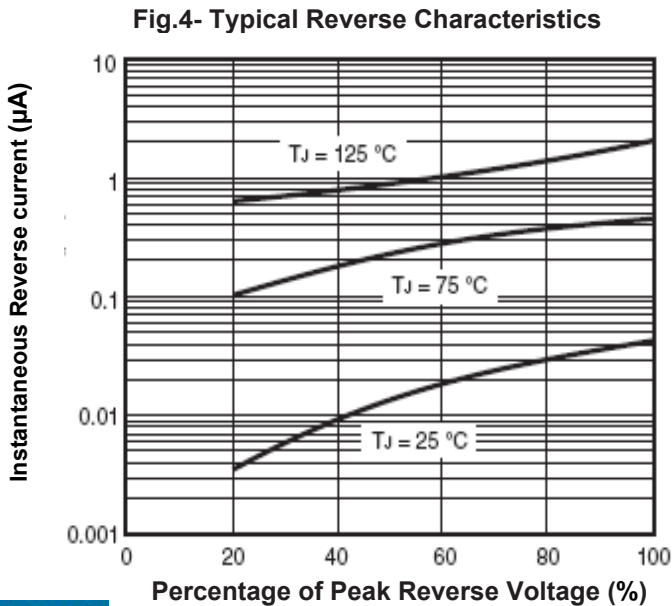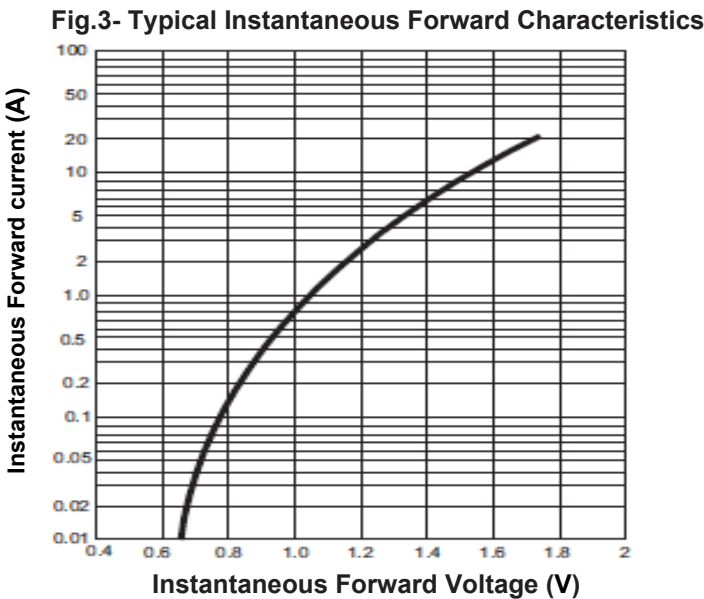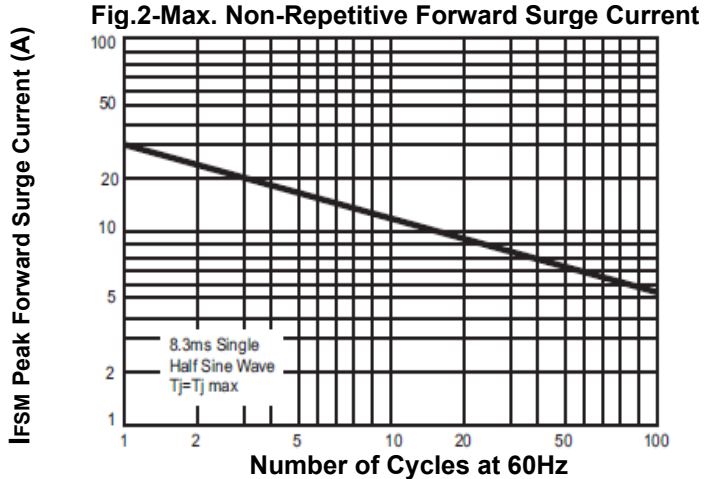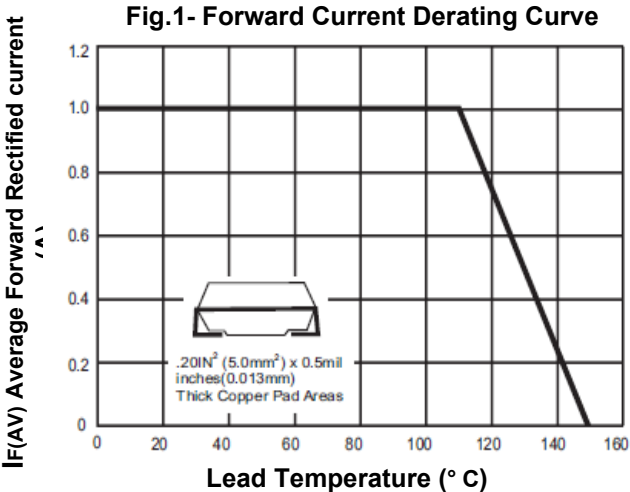


1.0A Surface Mount Rectifier

S1AB - S1MB

Fig.5- Junction Capacitance

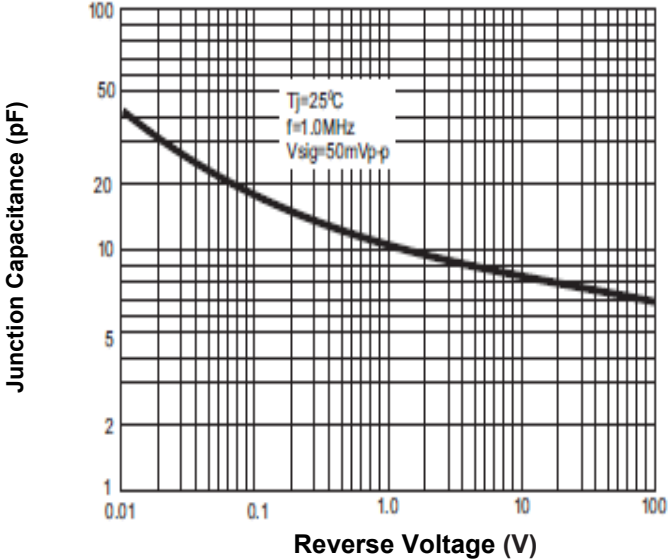

Dimensions in inch (mm)

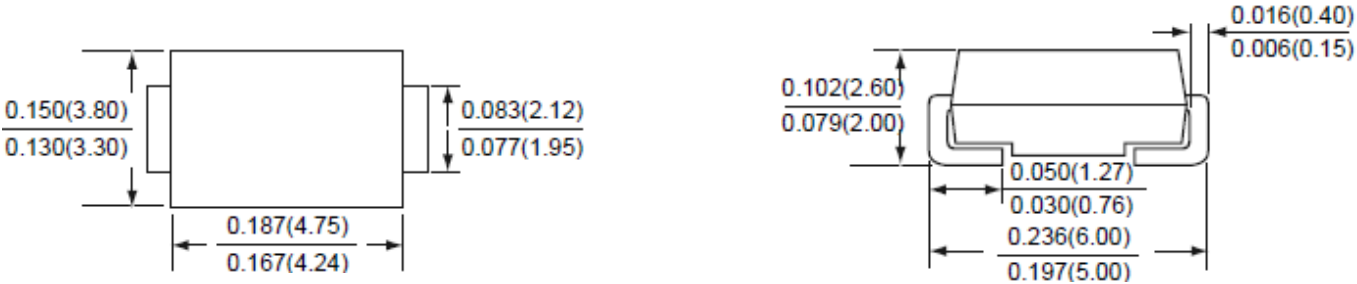

**SMB
(DO214AA)**

1.0A Surface Mount Rectifier

S1AB - S1MB

How to contact us

USA HEADQUARTERS

28040 WEST HARRISON PARKWAY, VALENCIA, CA 91355-4162

Tel: (800)-TAITRON (800)-824-8766 (661)-257-6060

Fax: (800)-TAITFAX (800)-824-8329 (661)-257-6415

Email: taitron@taitroncomponents.com

Http://www.taitroncomponents.com

TAITRON COMPONENTS INCORPORATED TAIWAN BRANCH

6F., NO.190, SEC. 2, ZHONGXING RD., XINDIAN DIST., NEW TAIPEI CITY 23146, TAIWAN R.O.C.

Tel: 886-2-2913-6238

Fax: 886-2-2913-6239

TAITRON COMPONENT TECHNOLOG SHANGHAI CORPORATION

SUITE 1503, METROBANK PLAZA, 1160 WEST YAN'AN ROAD, SHANGHAI, 200052, CHINA

Tel: +86-21-5424-9942

Fax: +86-21-2302-5027