


2.0A Standard Rectifier

Features

- Low Forward Voltage Drop
- High Current Capability
- High Surge Current Capability
- High Reliability
- High Temperature Soldering Guaranteed 260°C/10 seconds
.375" (9.5mm) lead length, 5lbs (2.3kg) tension
- RoHS compliant

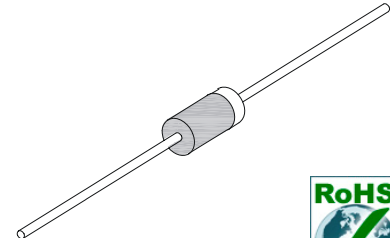

DO-15



Mechanical Data

Case:	Molded Plastic
Epoxy:	Meets UL 94V-0 flammability rating
Terminals:	Axial leads, solderable per MIL-STD-202, Method 208
Polarity:	Cathode indicated by color band
Weight:	0.014 Ounce, 0.39 gram

Maximum Ratings ($T_{Ambient}=25^{\circ}C$ unless noted otherwise)

Symbol	Description	T2A05	T2A10	T2A20	T2A40	T2A60	T2A80	T2A100	T2A130	Unit
V_{RRM}	Maximum Repetitive Peak Reverse Voltage	50	100	200	400	600	800	1000	1300	V
V_{RMS}	Maximum RMS Voltage	35	70	140	280	420	560	700	910	V
V_{DC}	Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	1300	V
I_{F(AV)}	Maximum Average Forward Rectified Current @ $T_a=75^{\circ}C$	2.0								A
I_{FSM}	Peak Forward Surge Current (Note1)	70								A
T_J	Operating Junction Temperature Range	-55 to +125								$^{\circ}C$
T_{STG}	Storage Temperature Range	-55 to +150								$^{\circ}C$

2.0A Standard Rectifier

T2A05 - T2A130

Electrical Characteristics ($T_{Ambient}=25^{\circ}C$ unless noted otherwise)

Symbol	Description	T2A05	T2A10	T2A20	T2A40	T2A60	T2A80	T2A100	T2A130	Unit
V_F	Maximum Forward Voltage @ $I_F=2.0A$	1.0								V
I_R	Maximum DC Reverse Current at Rated DC Blocking Voltage	$T_A=25^{\circ}C$				5.0				μA
		$T_A=100^{\circ}C$				50				μA
C_J	Typical Junction Capacitance (Note2)	20								pF
$R_{\theta-JA}$	Maximum Thermal Resistance (Note3)	50								$^{\circ}C/W$

- Note:**
1. 8.3ms single half sine-wave superimposed on rated load (JEDEC method)
 2. Measured at 1MHz and applied reverse voltage of 4.0Volts D.C.
 3. Thermal resistance from junction to ambient at .375" (9.5mm) lead length.

Typical Characteristics Curves

Fig.1- Forward Current Derating Curve


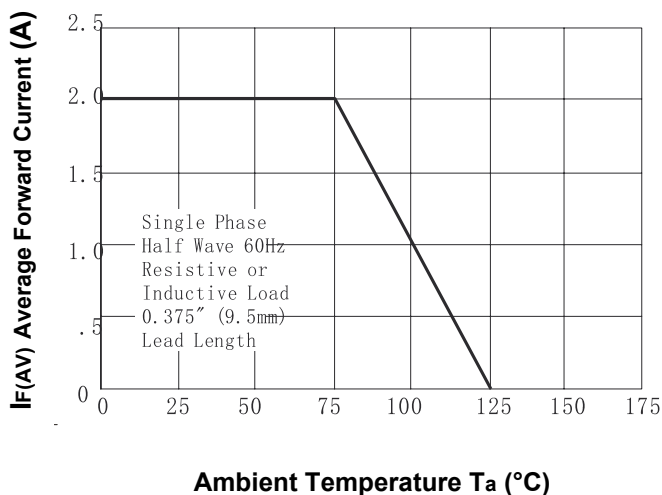


Fig.2-Max. Non-Repetitive Forward Surge Current

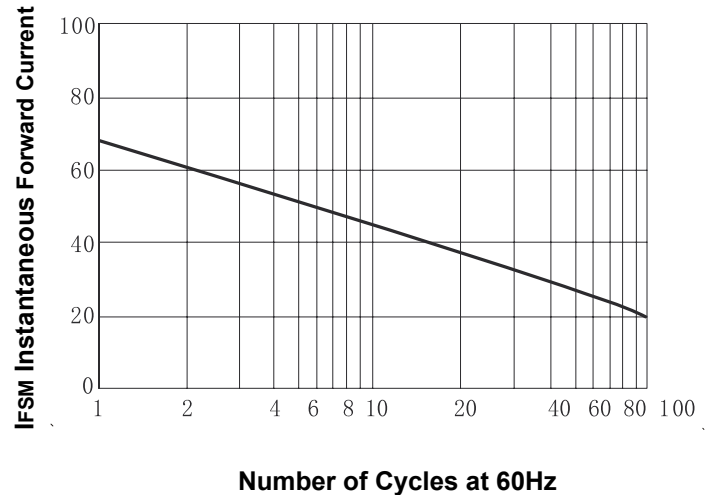

2.0A Standard Rectifier

T2A05 - T2A130

Fig.3-Typical Instantaneous Forward Characteristics

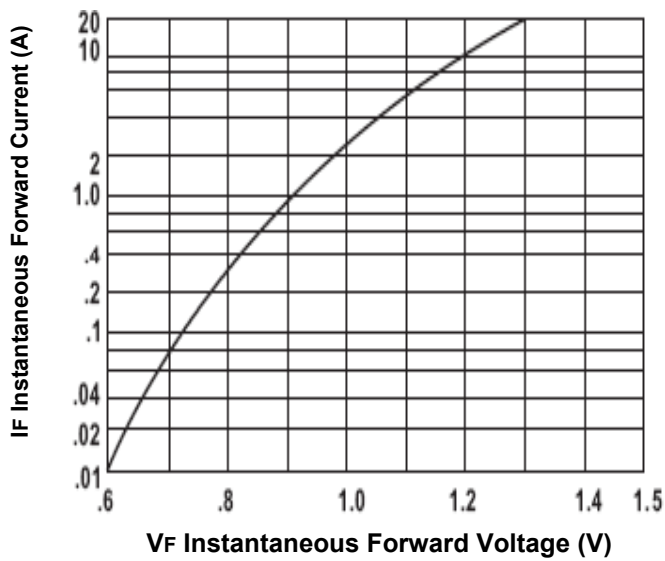


Fig.4- Typical Reverse Characteristics


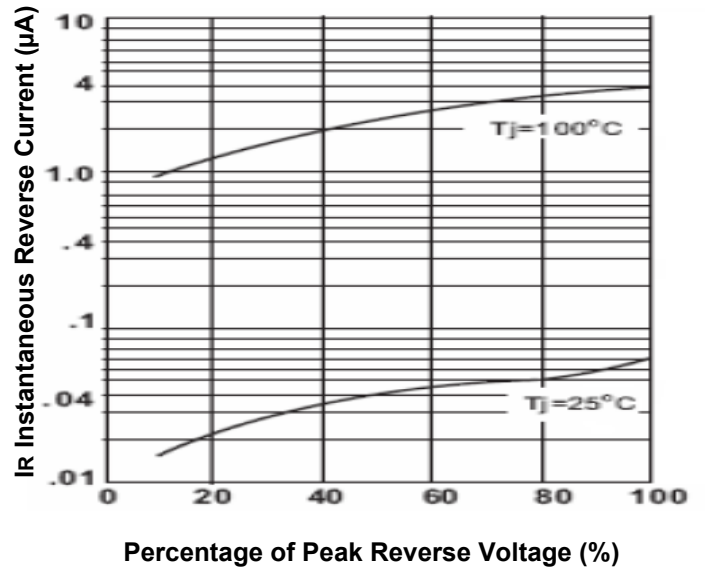



Fig.5-Typical Junction Capacitance

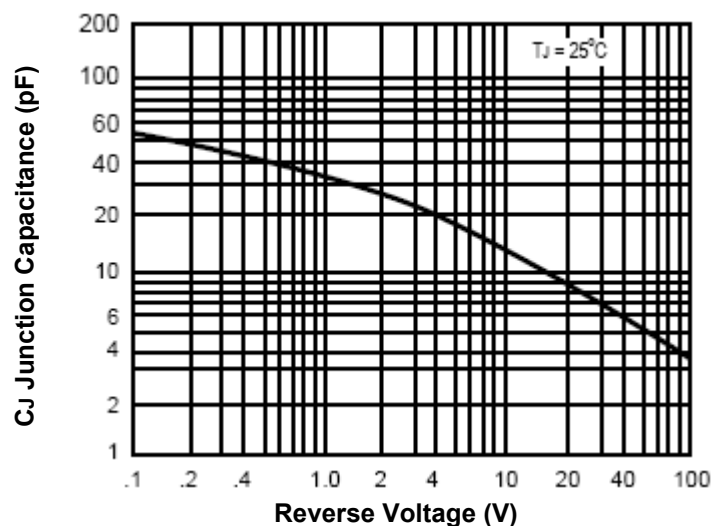

2.0A Standard Rectifier

T2A05 - T2A130

Dimensions in inches (mm)

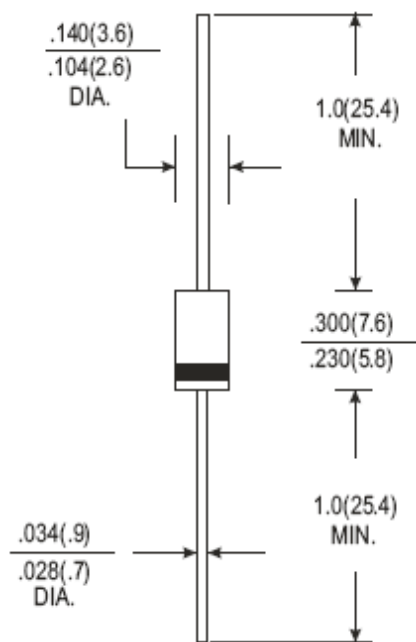

DO-15

How to contact us

USA HEADQUARTERS

28040 WEST HARRISON PARKWAY, VALENCIA, CA 91355-4162

Tel: (800)-TAITRON (800)-824-8766 (661)-257-6060

Fax: (800)-TAITFAX (800)-824-8329 (661)-257-6415

Email: taitron@taitroncomponents.com

Http://www.taitroncomponents.com

TAITRON COMPONENTS INCORPORATED TAIWAN BRANCH

6F., NO.190, SEC. 2, ZHONGXING RD., XINDIAN DIST., NEW TAIPEI CITY 23146, TAIWAN R.O.C.

Tel: 886-2-2913-6238

Fax: 886-2-2913-6239

TAITRON COMPONENT TECHNOLOG SHANGHAI CORPORATION

SUITE 1503, METROBANK PLAZA, 1160 WEST YAN'AN ROAD, SHANGHAI, 200052, CHINA

Tel: +86-21-5424-9942

Fax: +86-21-2302-5027