


3.0A Glass Passivated Bridge Rectifier

Features

- High forward surge current capability
- Ideal for printed circuit board
- High temperature soldering guaranteed:
260°C/10 seconds, at 5 lbs. (2.3kg) tension



TB3 

Mechanical Data

Case:	Molded plastic body
Epoxy:	Meets UL 94V-0 flammability rating
Terminals:	Lead solderable per MIL-STD-202, Method 208
Polarity:	Hole thru for #6 screw
Weight:	0.093 ounce, 2.62 grams

Maximum Ratings & Electrical Characteristics ($T_{Ambient}=25^{\circ}C$ unless noted)

Symbol	Description	TB305G	TB31G	TB32G	TB34G	TB36G	TB38G	TB310G	Unit	Conditions	
VRRM	Maximum Repetitive Peak Reverse Voltage	50	100	200	400	600	800	1000	V		
VRMS	Maximum RMS Voltage	35	70	140	280	420	560	700	V		
VDC	Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	V		
IO(AV)	Maximum Average Forward Rectified Current	3.0								A	TA=50°C
IFSM	Peak Forward Surge Current	50								A	Note
VF	Maximum Forward Voltage	1.1								V	IO=1.5A
IR	Maximum Reverse Current at Rated DC Blocking Voltage per element	10.0								uA	TA = 25 °C
		500									TA =125 °C
TJ	Operating Temperature Range	-55 to +150								°C	
TSTG	Storage Temperature Range	-55 to +150								°C	

Note:

8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)

3.0A Glass Passivated Bridge Rectifier

TB305G - TB310G

Typical Characteristics Curves

Fig.1- Derating Curve for Output Rectified Current

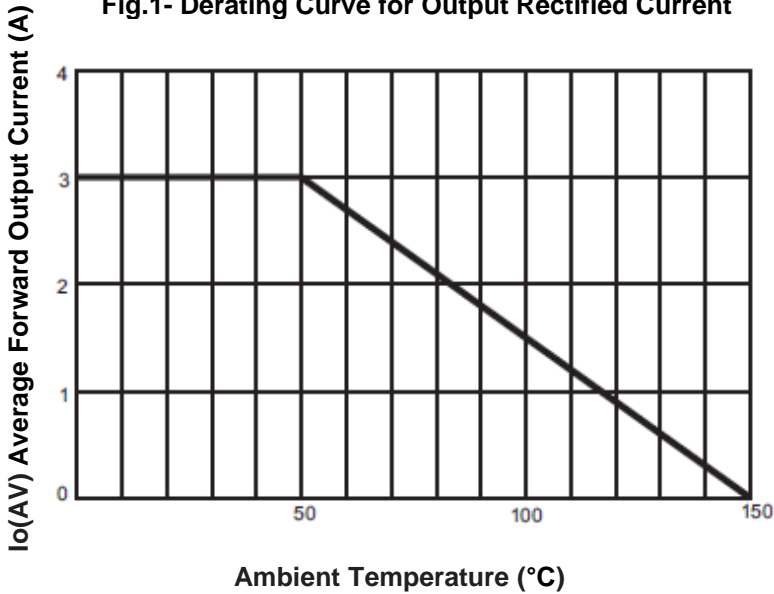


Fig.2- Maximum Non-Repetitive Peak Forward Surge Current Per Element

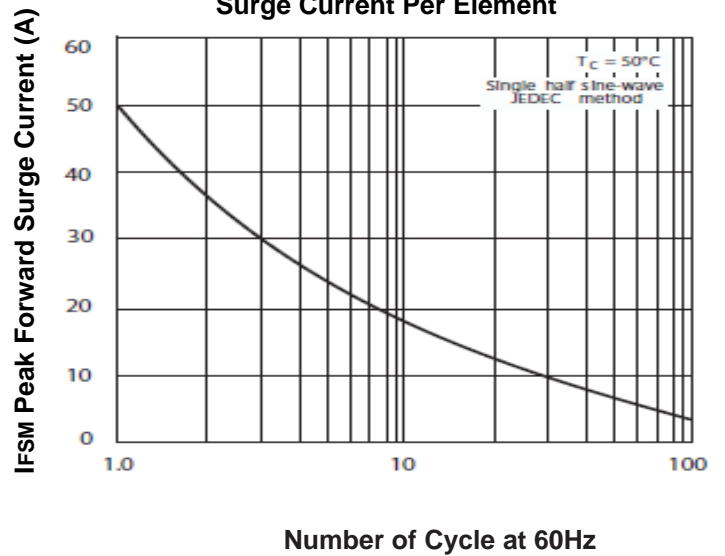


Fig.3- Typical Forward Characteristics Per Bridge Element


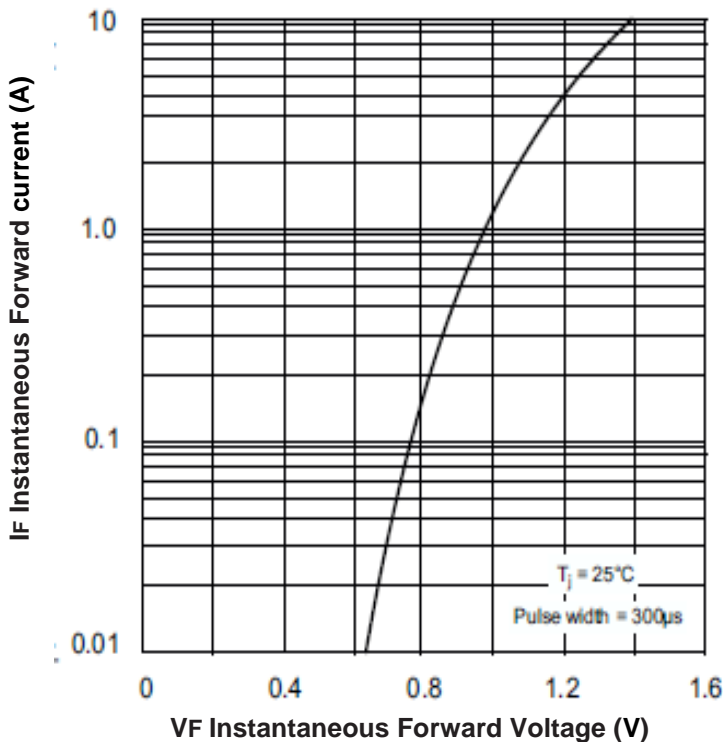


Fig.4- Typical Reverse Characteristics Per Bridge Element

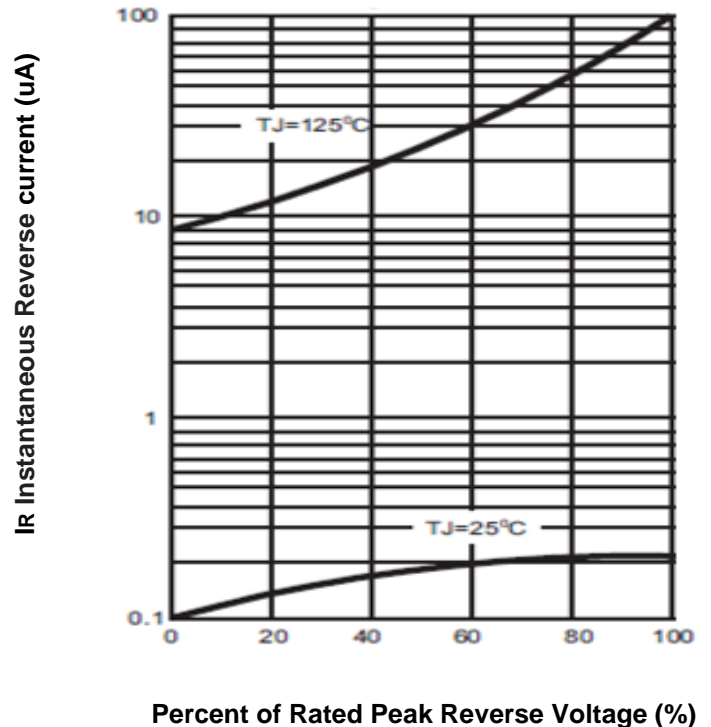


3.0A Glass Passivated Bridge Rectifier

TB305G - TB310G

Dimensions in inch (mm)

TB3

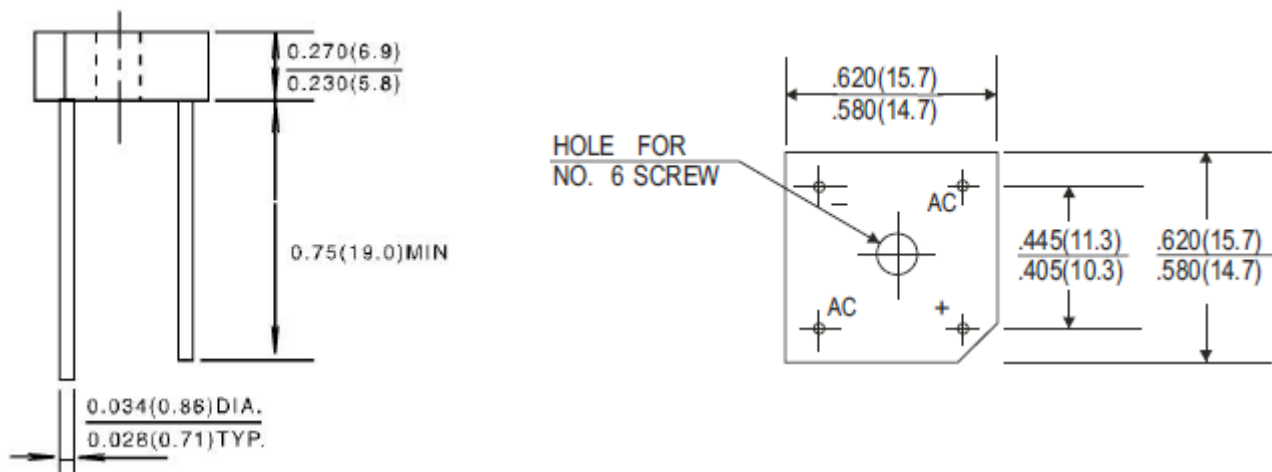

How to contact us

USA HEADQUARTERS

28040 WEST HARRISON PARKWAY, VALENCIA, CA 91355-4162

Tel: (800)-TAITRON (800)-824-8766 (661)-257-6060

Fax: (800)-TAITFAX (800)-824-8329 (661)-257-6415

Email: taitron@taitroncomponents.com

Http://www.taitroncomponents.com

TAITRON COMPONENTS INCORPORATED TAIWAN BRANCH

6F., NO.190, SEC. 2, ZHONGXING RD., XINDIAN DIST., NEW TAIPEI CITY 23146, TAIWAN R.O.C.

Tel: 886-2-2913-6238

Fax: 886-2-2913-6239

TAITRON COMPONENT TECHNOLOG SHANGHAI CORPORATION

SUITE 1503, METROBANK PLAZA, 1160 WEST YAN'AN ROAD, SHANGHAI, 200052, CHINA

Tel: +86-21-5424-9942

Fax: +86-21-2302-5027