


8A Schottky Barrier Rectifier

Features

- Lead less chip form, no lead damage
- Low power loss, High efficiency
- High current capability, low V_F
- RoHS Compliant and Halogen Free
- AEC - Q101 qualified



Application

- Switching mode power supply applications
- Portable equipment battery applications
- High frequency rectification
- DC / DC Converter
- Designed as bypass diodes for solar panels

P5Y

HALOGEN
FREE



Mechanical Data

Case:	Packed with FRP substrate and epoxy under filled
Epoxy:	Plastic package has UL flammability classification 94V-0
Terminals:	Pure Tin plated. Solder plated, solderable per MIL-STD-750, Method 2026
Weight:	0.0036 ounce, 0.102 gram

Absolute Maximum Ratings *(T_{Ambient}=25°C unless noted otherwise)*

Symbol	Description	Value	Unit	Conditions
VRRM	Repetitive Peak Reverse Voltage	100	V	
VRMS	Max. RMS Voltage	70	V	
IF(AV)	Max. Average Forward Rectified Current	8.0	A	See Fig.1
IFSM	Non-Repetitive Peak Forward Surge Current	170	A	8.3ms single half sine-wave
TJ, TSTG	Operating Junction and Storage Temperature Range	-55 to +150	°C	

8A Schottky Barrier Rectifier

TSCD810P5Y

Electrical Characteristics ($T_{Ambient}=25^{\circ}\text{C}$ unless noted otherwise)

Symbol	Description	Typ.	Max.	Unit	Conditions
VF	Forward Voltage (Note 1)	0.75	0.80	V	$I_F=8.0\text{A}$
IR	Reverse Current	0.01	0.10	mA	$V_R=\text{Max. } V_{RRM}$
		-	50		
Rθ-JA	Thermal Resistance Junction to Ambient	60	-	$^{\circ}\text{C/W}$	Note 2
Rθ-JL	Thermal Resistance Junction to Lead	22	-	$^{\circ}\text{C/W}$	Note 2
Rθ-JC	Thermal Resistance Junction to Case	20	-	$^{\circ}\text{C/W}$	Note 2

- Note:**
1. Pulse test width $PW=300\mu\text{sec}$, 1% duty cycle.
 2. Mounted on P.C.B. with 14 x 14mm copper pad areas.

Typical Characteristics Curves

Fig.1- Typical Forward Current Derating Curve

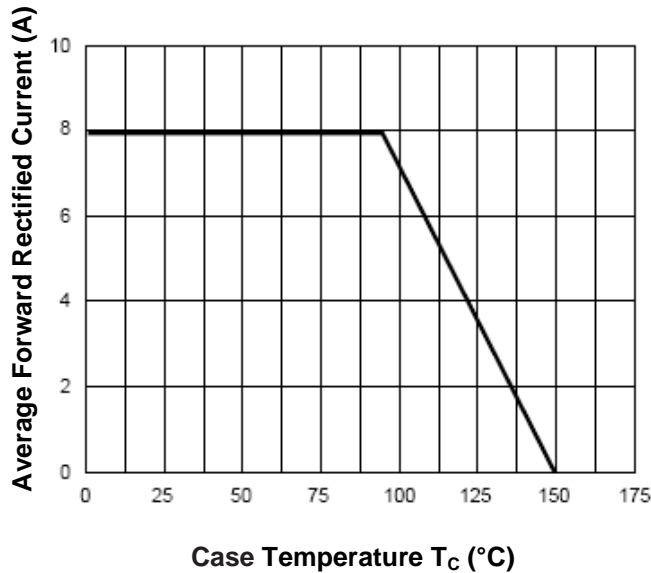


Fig.2- Max. Non-Repetitive Forward Surge Current

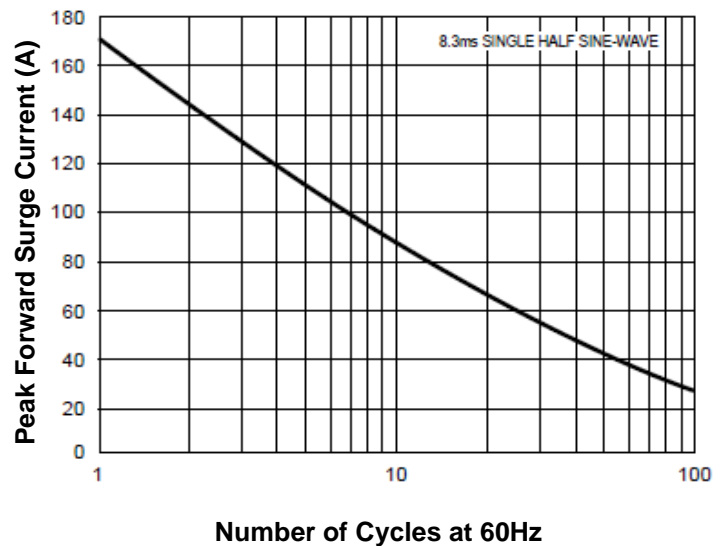


Fig.3- Typical Instantaneous Forward Characteristics



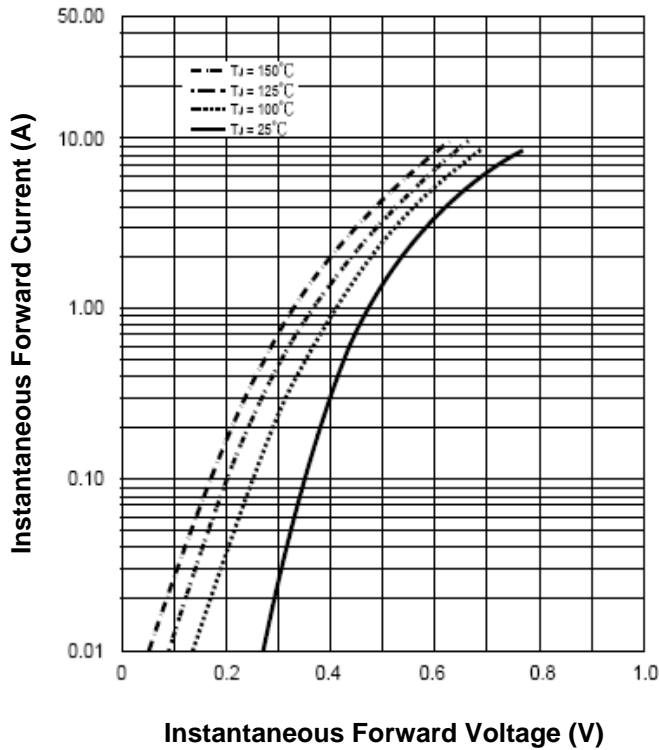



Fig.4- Typical Reverse Characteristics

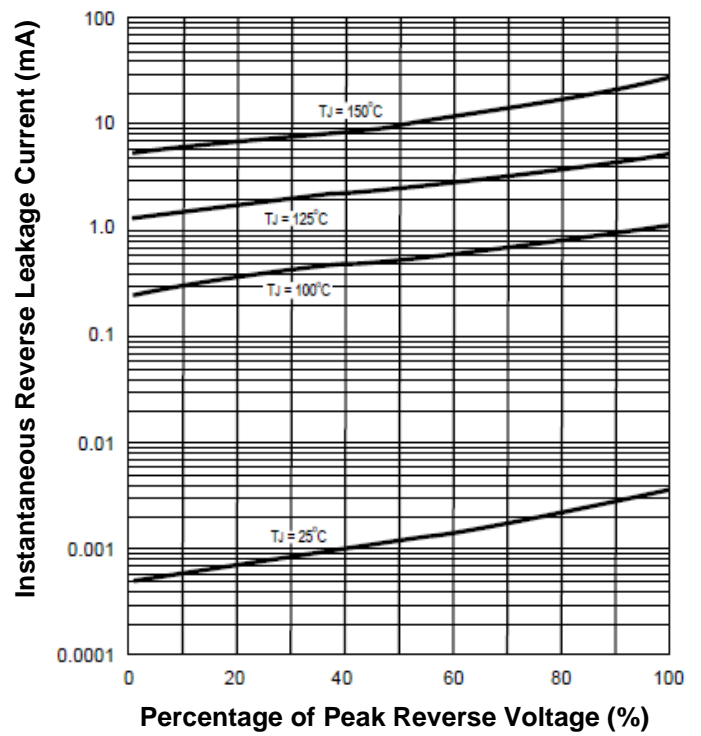


Marking Information:




Dimensions in mm

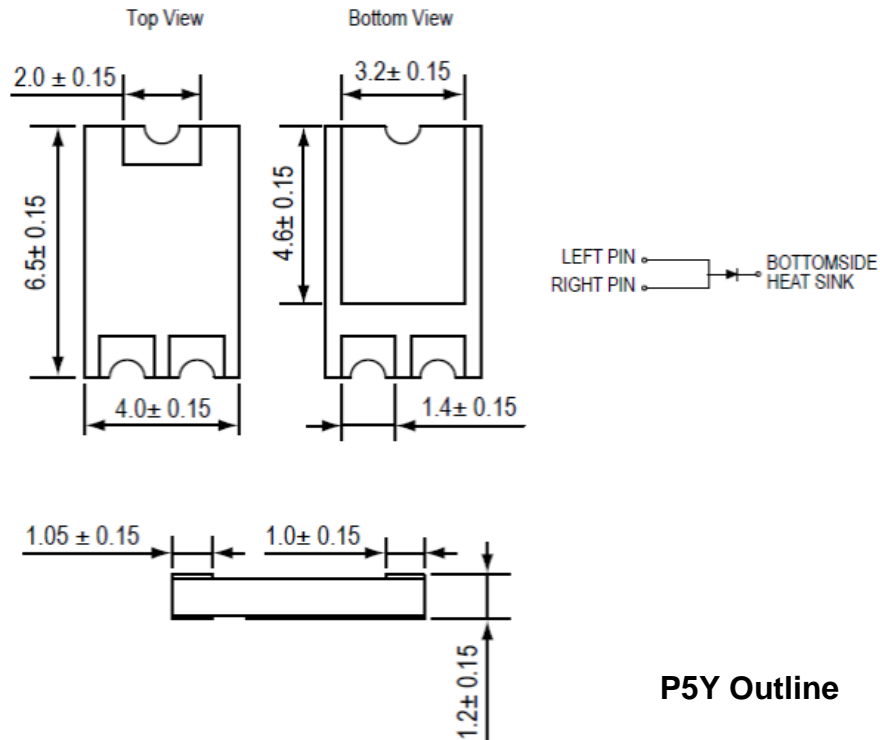

Mounting Pad Layout in inch (mm)

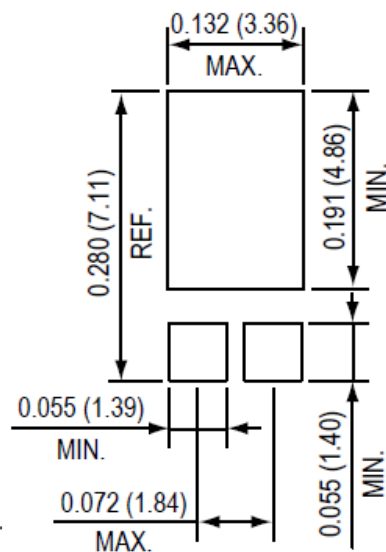


Recommendations for SMD Soldering Conditions

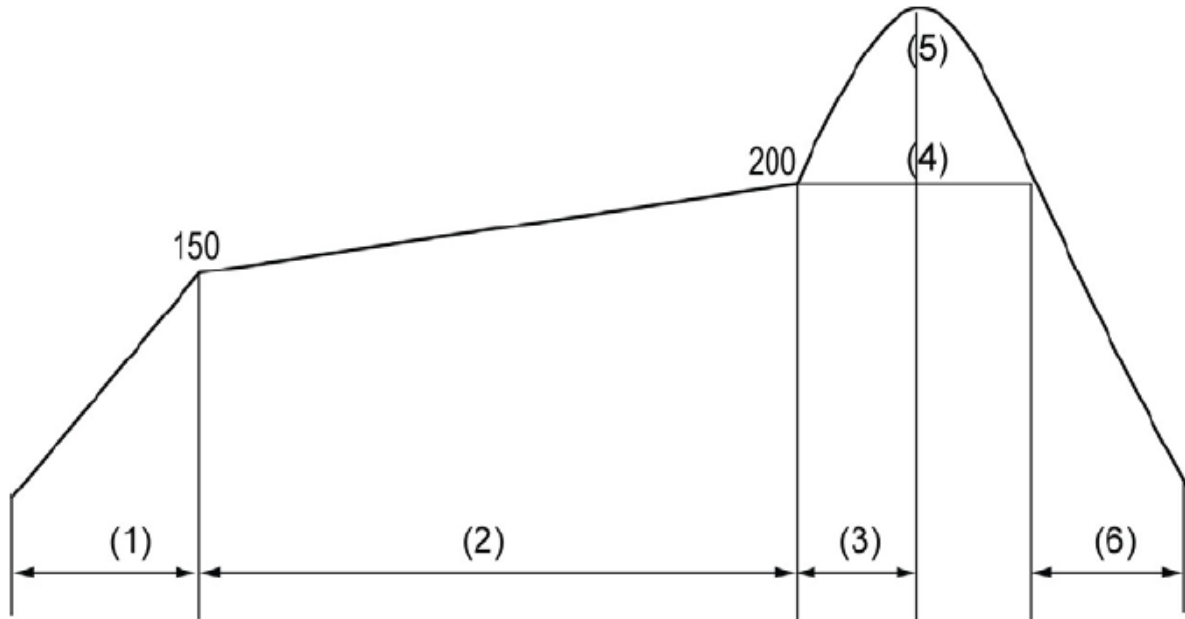

	(1) Ramp up	(2) Pre-heating zone	(3)	(4) Soldering zone	(5) Peak	(6) Ramp down
Temp.	Room temp to 150°C	150~200	200°C to peak	≥ 220°C	≤ 260°C	
Time	≤ 3°C/sec	Max. 120sec	1~4°C/sec	Max. 60sec	Max. 10 sec	1~4°C/sec

The duration and peak temperature as shown in the above table could conform to the concerned profile condition, T_p : 255°C~260°C and Duration Time: 30sec, as required in JEDEC J-STD-020 Rev. D. It would take 25~30sec to raise the soldering zone temperature, kept at 260°C (5. Peak) for about 35~40sec before ramping down, from 220°C to 260°C.


Packing Information in mm

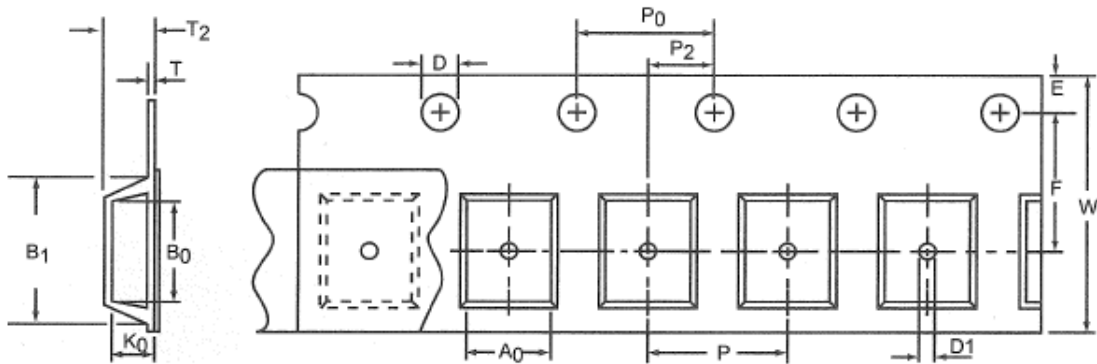

Product Type	A0	B0	K0	D	E	P0	T
		See Note			1.50±0.1	1.75±0.1	4.00±0.1
P5Y	B1	D1	F	P	P2	W	T2
	8.20 Max.	1.50 Min.	5.50±0.05	8.00±0.1	2.00±0.1	12.00±0.3	1.65±0.1

Note: Symbol A0, B0, K0 are determined by the maximum dimensions of the component size. The clearance between the component and the cavity must be within 0.05 mm (0.002") min. to 0.50 mm (0.02") max. for 12 mm tape.

Reel Dimensions in mm

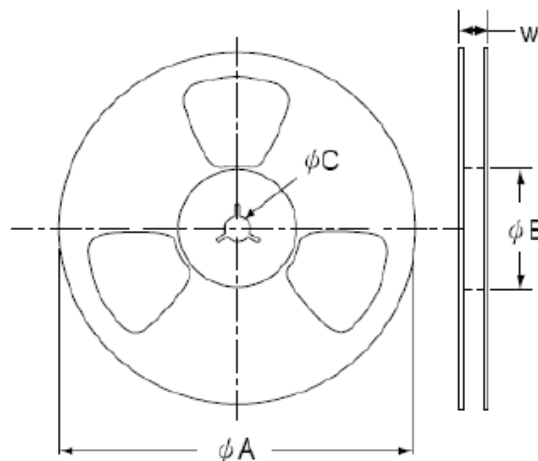

Product Type	ΦA	ΦB	ΦC	W
P5Y	330.00±2.0	50.00 Min.	13.00±0.5	18.70 Max.


8A Schottky Barrier Rectifier

TSCD810P5Y

Packing Quantity Information:

Quantity	PCS per Reel	PCS per Inner Box	PCS per Carton
RG30 Tape & Reel	5,000	10,000	50,000

Ordering Information

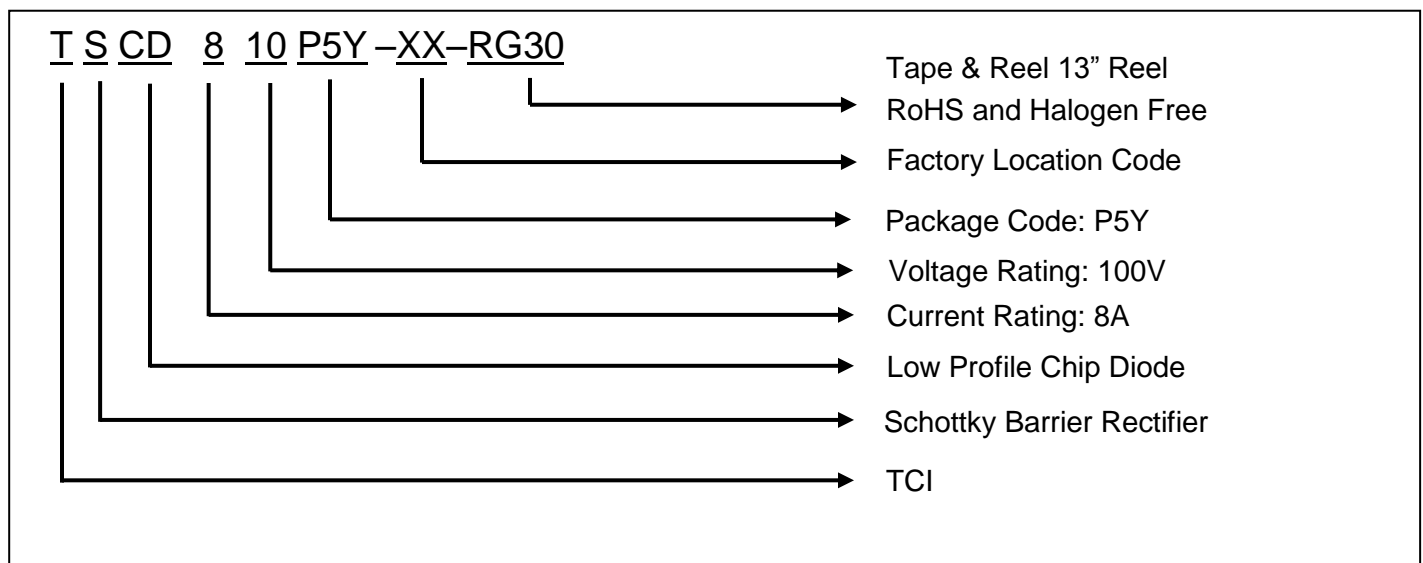

How to contact us

US HEADQUARTERS

28040 WEST HARRISON PARKWAY, VALENCIA, CA 91355-4162

Tel: (800)-TAITRON (800)-824-8766 (661)-257-6060

Fax: (800)-TAITFAX (800)-824-8329 (661)-257-6415

Email: taitron@taitroncomponents.com

Http://www.taitroncomponents.com

TAITRON COMPONENTS MEXICO, S.A .DE C.V.

BOULEVARD CENTRAL 5000 INTERIOR 5 PARQUE INDUSTRIAL ATITALAQUIA, HIDALGO

C.P. 42970 MEXICO

Tel: +52-55-5560-1519

Fax: +52-55-5560-2190

TAITRON COMPONENTS INCORPORATED TAIWAN, TAIPEI

6F., No.190, Sec. 2, Zhongxing Rd., Xindian Dist., New Taipei City 23146, Taiwan R.O.C.

Tel: 886-2-2913-6238

Fax: 886-2-2913-6239

TAITRON COMPONENT TECHNOLOGY, SHANGHAI CORPORATION

METROBANK PLAZA, 1160 WEST YAN'AN ROAD, SUITE 1503, SHANGHAI, 200052, CHINA

Tel: +86-21-5424-9942

Fax: +86-21-2302-5027