


3.0A Super Fast Recovery Rectifier

Features

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability
- High temperature soldering guaranteed 250°C/10 seconds
/.0375" (9.5mm) lead length, 5lbs (2.3kg) tension
- RoHS Compliance



DO-201AD



Mechanical Data

Case:	DO-201AD, molded plastic
Epoxy:	UL 94V-0 rate flame retardant
Terminals:	Axial leads, solderable per MIL-STD-202, Method 208 guaranteed
Polarity:	Color band denotes cathode end
Weight:	1.2 grams

Maximum Ratings and Electrical Characteristics ($T_A=25^\circ\text{C}$ unless noted otherwise)

Symbol	Description	TSF31	TSF32	TSF33	TSF34	TSF35	TSF36	TSF38	Unit	Conditions
V_{RRM}	Maximum Repetitive Peak Reverse Voltage	50	100	150	200	300	400	600	V	
V_{RMS}	Maximum RMS Voltage	35	70	105	140	210	280	420	V	
V_{DC}	Maximum DC Blocking Voltage	50	100	150	200	300	400	600	V	
I_{AV}	Maximum Average Forward Rectified Current	3.0							A	T _a =55 °C
I_{FSM}	Peak Forward Surge Current	125							A	8.3ms single half sine-wave superimposed on rated load (JEDEC method)

3.0A Super Fast Recovery Rectifier

TSF31 - TSF38

Symbol	Description	TSF31	TSF32	TSF33	TSF34	TSF35	TSF36	TSF38	Unit	Conditions	
V_F	Maximum Instantaneous Forward Voltage	0.95			1.25		1.70		V	I _F =3.0 A	
I_R	Maximum DC Reverse Current at Rated DC Blocking Voltage	5.0								μA	T _A =25° C
		100									T _A =100° C
T_{rr}	Typical Reverse Recovery Time	35								nS	I _F =0.5A, I _R =1A, I _{rr} =0.25A
C_J	Typical Junction Capacitance	100				80				pf	V _R =4V, f=1MHz
T_J	Operating Temperature range	-55 to +125								° C	
T_{STG}	Storage Temperature Range	-55 to +150									

Typical Characteristics Curves

Fig.1-Max. Forward Current Derating Curve


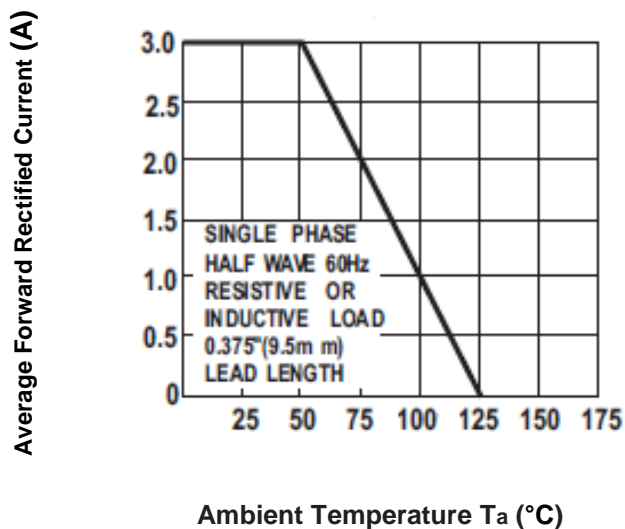


Fig.2-Max. Non-Repetitive Forward Surge Current

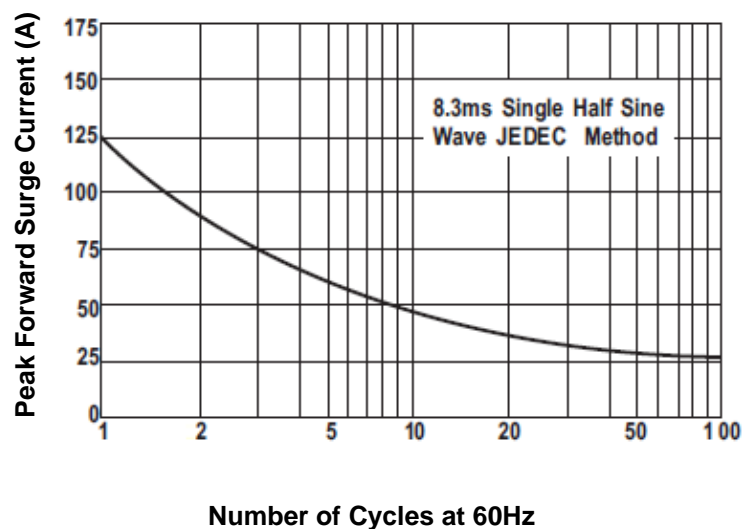

3.0A Super Fast Recovery Rectifier

TSF31 - TSF38

Fig.3- Typical Forward Characteristics

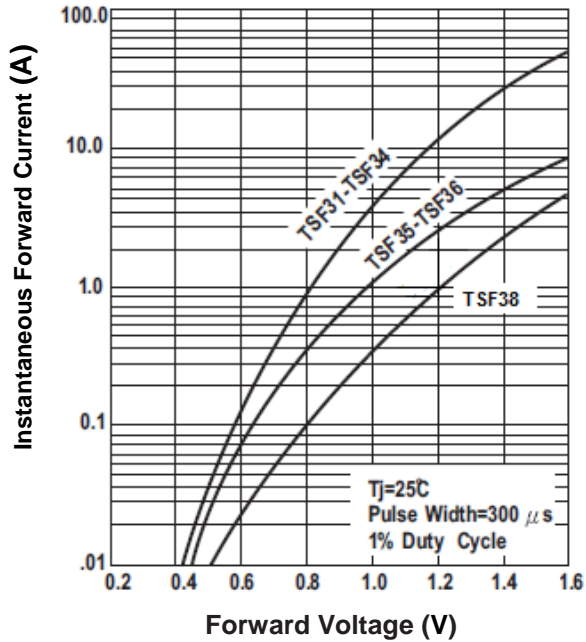


Fig.4-Typical Reverse Characteristics


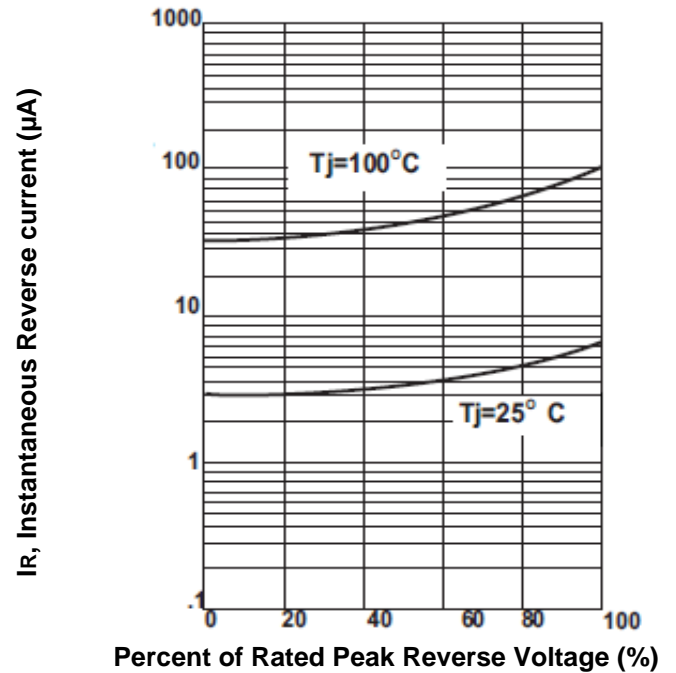



Fig.5- Typical Junction Capacitance

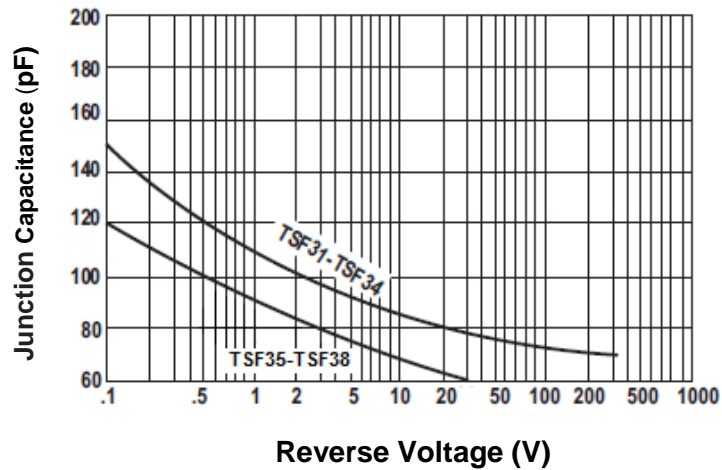

3.0A Super Fast Recovery Rectifier

TSF31 - TSF38

Dimensions in inches (mm)

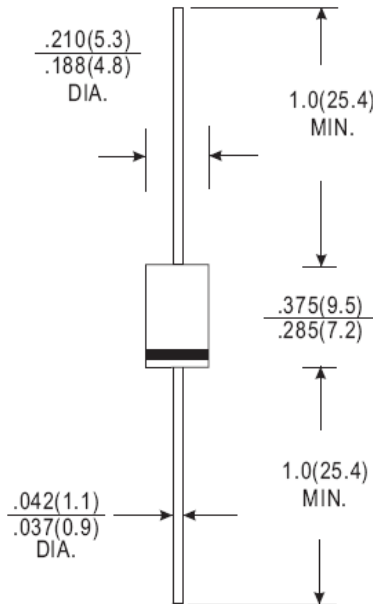

D0-201AD

How to contact us

US HEADQUARTERS

28040 WEST HARRISON PARKWAY, VALENCIA, CA 91355-4162

Tel: (800)-TAITRON (800)-824-8766 (661)-257-6060

Fax: (800)-TAITFAX (800)-824-8329 (661)-257-6415

Email: taitron@taitroncomponents.com

Http://www.taitroncomponents.com

TAITRON COMPONENTS MEXICO, S.A .DE C.V.

BOULEVARD CENTRAL 5000 INTERIOR 5 PARQUE INDUSTRIAL ATITALAQUIA, HIDALGO

C.P. 42970 MEXICO

Tel: +52-55-5560-1519

Fax: +52-55-5560-2190

TAITRON COMPONENTS INCORPORATED TAIWAN, TAPEI

6F., No.190, Sec. 2, Zhongxing Rd., Xindian Dist., New Taipei City 23146, Taiwan R.O.C.

Tel: 886-2-2913-6238

Fax: 886-2-2913-6239

TAITRON COMPONETS INCORPORATED, SHANGHAI REPRESENTATIVE OFFICE

METROBANK PLAZA, 1160 WEST YAN'AN ROAD, SUITE 1503, SHANGHAI, 200052, CHINA

Tel: +86-21-5424-9942

Fax: +86-21-5424-9931