


## 10A Bridge Rectifiers

### Features

- Low forward voltage drop
- High current capability
- High reliability
- High forward surge current capability
- Ideal for printed circuit board
- High temperature soldering guaranteed:  
260° C/10 seconds, /.375" (9.5mm) lead length at 5 lbs.(2.3kg) tension

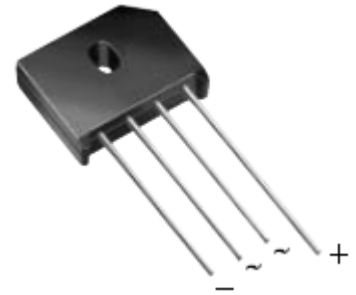

TU

### Mechanical Data

<b>Case:</b>	Molded plastic
<b>Terminals:</b>	Plated leads solderable per MIL-STD-202E, Method 208C
<b>Polarity:</b>	As marked on body
<b>Mounting Torque:</b>	8.8 in. – lbs. max.
<b>Weight:</b>	0.3 ounces, 8.0 grams

### Maximum Ratings And Electrical Characteristics (T<sub>amb</sub>=25°C)

Symbols	Parameter	TU 1000	TU 1001	TU 1002	TU 1004	TU 1006	TU 1008	TU 1010	Unit	Conditions
<b>VRRM</b>	Maximum Repetitive Peak Reverse Voltage	50	100	200	400	600	800	1000	V	
<b>VRMS</b>	Maximum RMS Voltage	35	70	140	280	420	560	700	V	
<b>VDC</b>	Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	V	
<b>IF(AV)</b>	Maximum Average Forward Rectified Current (Note 1)	10							A	TC=100°C
<b>IFSM</b>	Peak Forward Surge Current	300							A	8.3ms single half sine-wave superimposed on rated load (JEDEC Method)
<b>VF</b>	Maximum Instantaneous Forward Voltage Drop per leg	1.1							V	IF=10.0A
<b>IR</b>	Maximum DC Reverse Current at Rated DC Blocking Voltage per leg	5.0							µA	TA=25°C
		1.0							mA	TA=100°C

# 10A Bridge Rectifiers

## TU1000 - TU1010

Symbols	Parameter	TU 1000	TU 1001	TU 1002	TU 1004	TU 1006	TU 1008	TU 1010	Unit	Conditions
$I_{Tt}$	Rating for Fusing (1ms<t<8.3ms)	373							A <sup>2</sup> S	
$C_J$	Typical Junction Capacitance	200							pF	V <sub>R</sub> =4V, f=1MHz
$R_{\theta JA}$	Typical Thermal Resistance per leg	16							°C/W	(Note 2)
$R_{\theta JC}$	Typical Thermal Resistance per leg	5.0							°C/W	(Note 1)
$T_J, T_{STG}$	Operating and Storage Temperature Range	-55 to 150							°C	

### Note:

- Unit mounted on 6.0" x 5.5" x 0.24" thick (15 x 14 x 0.6cm) Al. plate.
- Unit mounted in free air, no heatsink, P.C.B at 0.375" (9.5mm) lead length with 0.5" x 0.5" (12 x 12mm) copper pads
- Single Phase, half wave, 60 Hz, resistive or inductive load.  
For capacitive load, derate current by 20%

### Rating and characteristic curves

Fig.1- Derating Curve Output Rectified Current

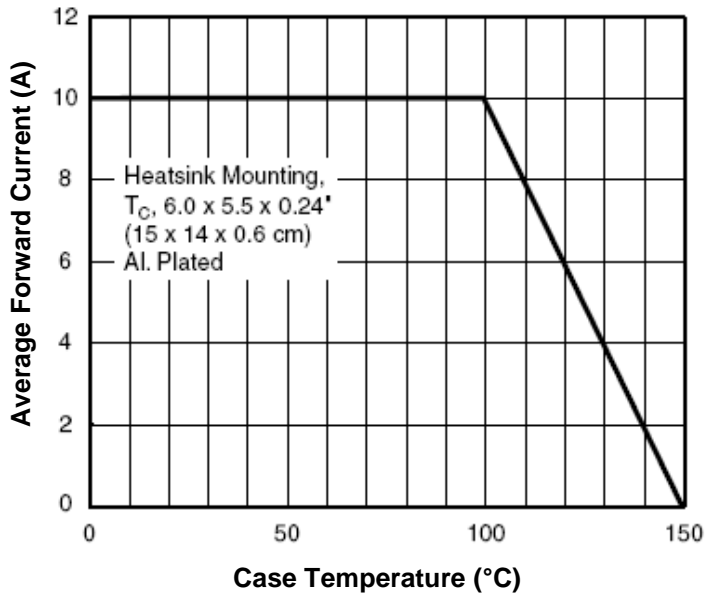


Fig.2-Max Non-Repetitive Peak Forward Surge Current per leg

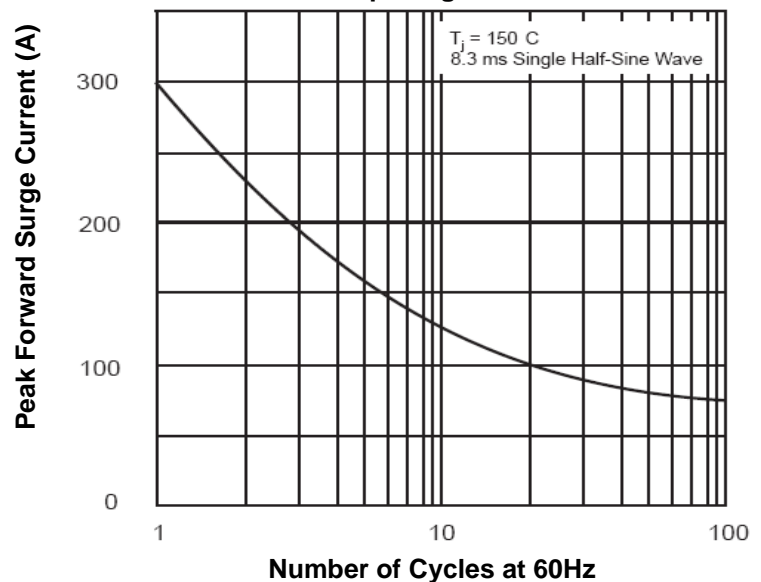


Fig.3- Typical Instantaneous Forward Characteristics, per leg

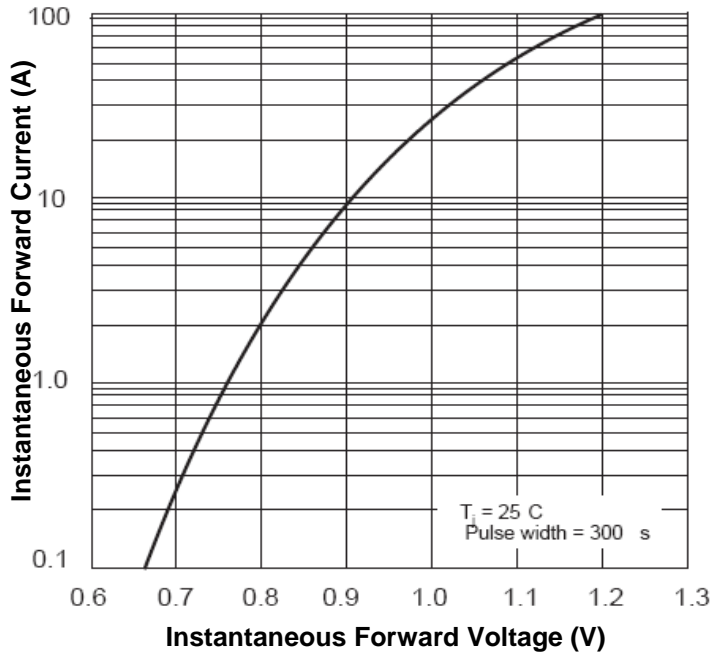


Fig.4-Typical Reverse Leakage Characteristics per leg



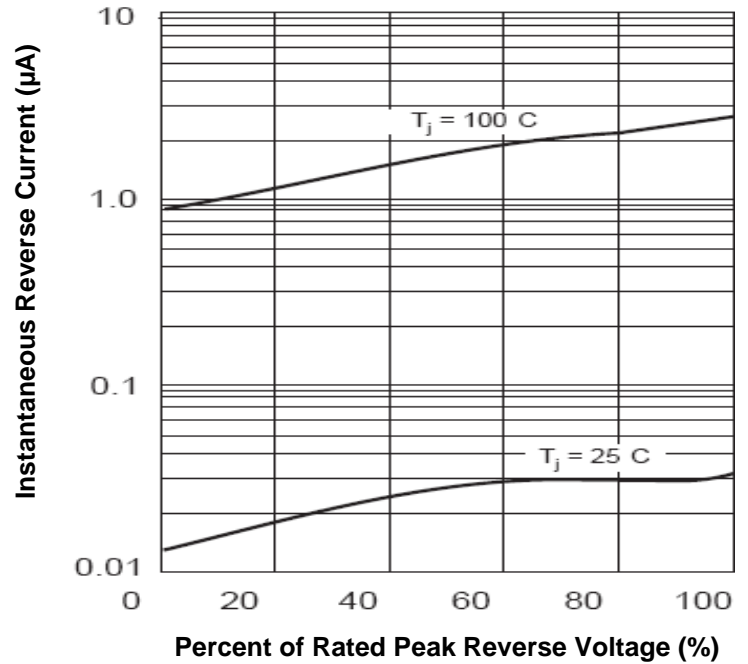


Fig.5-Typical Junction Capacitance per leg

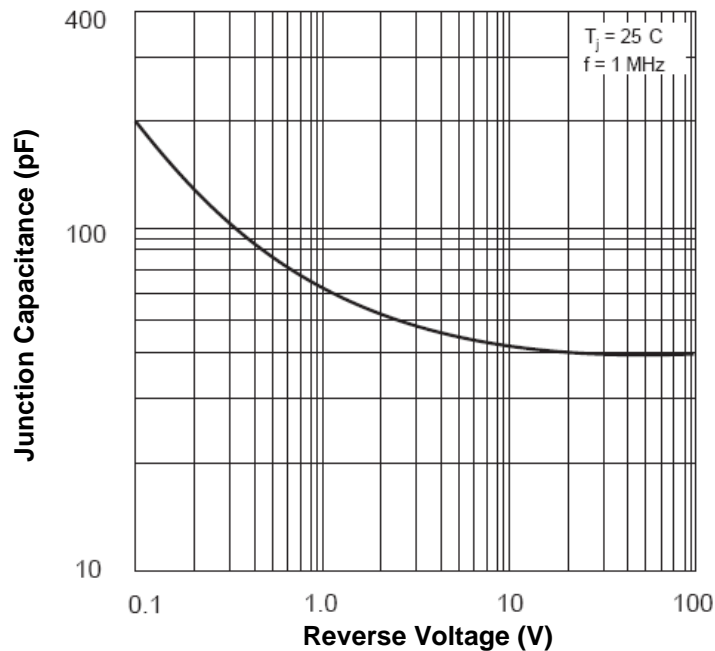

### Dimensions in inch (mm)

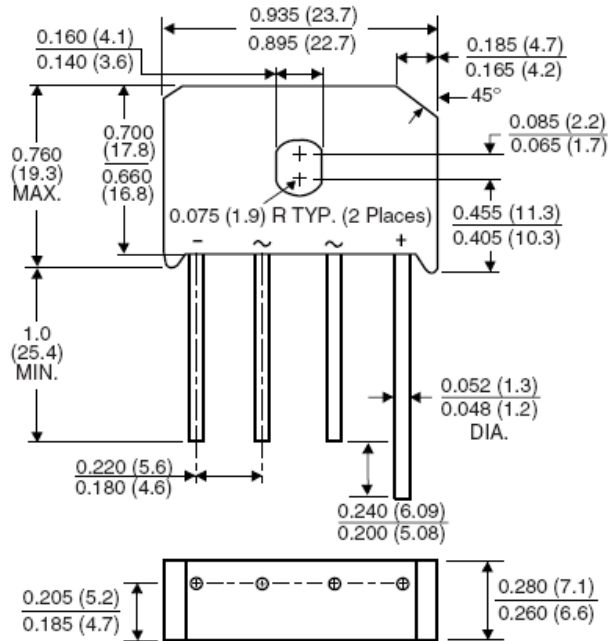

TU

### How to contact us

#### USA HEADQUARTERS

28040 WEST HARRISON PARKWAY, VALENCIA, CA 91355-4162

Tel: (800)-TAITRON (800)-824-8766 (661)-257-6060

Fax: (800)-TAITFAX (800)-824-8329 (661)-257-6415

Email: [taitron@taitroncomponents.com](mailto:taitron@taitroncomponents.com)

Http://[www.taitroncomponents.com](http://www.taitroncomponents.com)

#### TAITRON COMPONENTS INCORPORATED TAIWAN BRANCH

6F., NO.190, SEC. 2, ZHONGXING RD., XINDIAN DIST., NEW TAIPEI CITY 23146, TAIWAN R.O.C.

Tel: 886-2-2913-6238

Fax: 886-2-2913-6239

#### TAITRON COMPONENT TECHNOLOG SHANGHAI CORPORATION

SUITE 1503, METROBANK PLAZA, 1160 WEST YAN'AN ROAD, SHANGHAI, 200052, CHINA

Tel: +86-21-5424-9942

Fax: +86-21-2302-5027