

1.0W Surface Mount Zener Diodes

Features

- Silicon planar power zener diodes
- For use in stabilizing and clipping circuits with higher power rating
- Standard zener voltage tolerance is $\pm 5\%$
- Low profile package
- Built-in strain relief
- Low inductance
- RoHS compliant



MELF



Mechanical Data

Case:	Molded glass MELF
Terminals:	Solder plated, solderable per MIL-STD-750, Method 2026
Polarity:	Color band denotes cathode end
Weight:	0.135 grams

Maximum Ratings ($T_{Ambient}=25^{\circ}C$ unless noted otherwise)

Symbol	Description	Value	Unit	Conditions
P_{TOT}	Power Dissipation at $T_A=25^{\circ}C$	1	W	Note
T_J	Operation Junction Temperature Range	-65 to 200	$^{\circ}C$	
T_{STG}	Storage Temperature Range	-65 to 200	$^{\circ}C$	
V_F	Forward Voltage	1.2	V	$I_F=200mA$
R_{θJA}	Thermal Resistance Junction to Ambient Air	170	$^{\circ}C/W$	

Note: Valid provided that electrodes are kept at ambient temperature.

1.0W Surface Mount Zener Diodes

ZM4728A - ZM4764A

Electrical Characteristics ($T_{Ambient}=25^{\circ}C$ unless noted otherwise)

Part NO.	Nominal Zener Voltage @ IZT				Max. Zener Impedance (Ω)			Max. Reverse Leakage Current IR @ VR	
	Vz(V)			IZT(mA)	ZzT @ IZT	ZzK @ Izk	Izk(mA)	IR(μ A)	VR(V)
	Nom.	Min.	Max.						
ZM4728A	3.3	3.14	3.47	76.0	10.0	400	1.0	100	1.0
ZM4729A	3.6	3.42	3.78	69.0	10.0	400	1.0	100	1.0
ZM4730A	3.9	3.71	4.10	64.0	9.0	400	1.0	50	1.0
ZM4731A	4.3	4.09	4.52	58.0	9.0	400	1.0	10	1.0
ZM4732A	4.7	4.47	4.94	53.0	8.0	500	1.0	10	1.0
ZM4733A	5.1	4.85	5.36	49.0	7.0	550	1.0	10	1.0
ZM4734A	5.6	5.32	5.88	45.0	5.0	600	1.0	10	2.0
ZM4735A	6.2	5.89	6.51	41.0	2.0	700	1.0	10	3.0
ZM4736A	6.8	6.46	7.14	37.0	3.5	700	1.0	10	4.0
ZM4737A	7.5	7.13	7.88	34.0	4.0	700	0.5	10	5.0
ZM4738A	8.2	7.79	8.61	31.0	4.5	700	0.5	10	6.0
ZM4739A	9.1	8.65	9.56	28.0	5.0	700	0.5	10	7.0
ZM4740A	10	9.50	10.50	25.0	7.0	700	0.25	10	7.6
ZM4741A	11	10.45	11.55	23.0	8.0	700	0.25	5	8.4
ZM4742A	12	11.40	12.60	21.0	9.0	700	0.25	5	9.1
ZM4743A	13	12.35	13.65	19.0	10.0	700	0.25	5	9.9
ZM4744A	15	14.25	15.75	17.0	14.0	700	0.25	5	11.4
ZM4745A	16	15.20	16.80	15.5	16.0	700	0.25	5	12.2
ZM4746A	18	17.10	18.90	14.0	20.0	750	0.25	5	13.7
ZM4747A	20	19.00	21.00	12.5	22.0	750	0.25	5	15.2
ZM4748A	22	20.90	23.10	11.5	23.0	750	0.25	5	16.7
ZM4749A	24	22.80	25.20	10.5	25.0	750	0.25	5	18.2
ZM4750A	27	25.65	28.35	9.5	35.0	750	0.25	5	20.6
ZM4751A	30	28.50	31.50	8.5	40.0	1000	0.25	5	22.8
ZM4752A	33	31.35	34.65	7.5	45.0	1000	0.25	5	25.1
ZM4753A	36	34.20	37.80	7.0	50.0	1000	0.25	5	27.4
ZM4754A	39	37.05	40.95	6.5	60.0	1000	0.25	5	29.7
ZM4755A	43	40.85	45.15	6.0	70.0	1500	0.25	0.5	32.7


1.0W Surface Mount Zener Diodes

ZM4728A - ZM4764A

Part NO.	Nominal Zener Voltage @ IZT				Max. Zener Impedance (Ω)			Max. Reverse Leakage Current IR @ VR	
	Vz(V)			IZT(mA)	ZzT @ IZT	Zzk @ Izk	Izk(mA)	IR(μ A)	VR(V)
	Nom.	Min.	Max.						
ZM4756A	47	44.65	49.35	5.5	80.0	1500	0.25	0.5	35.8
ZM4757A	51	48.45	53.55	5.0	95.0	1500	0.25	0.5	38.8
ZM4758A	56	53.20	58.80	4.5	110.0	2000	0.25	0.5	42.6
ZM4759A	62	58.90	65.10	4.0	125.0	2000	0.25	0.5	47.1
ZM4760A	68	64.60	71.40	3.7	150.0	2000	0.25	0.5	51.7
ZM4761A	75	71.25	78.75	3.3	175.0	2000	0.25	0.5	56.0
ZM4762A	82	77.90	86.10	3.0	200.0	3000	0.25	0.5	62.2
ZM4763A	91	86.45	95.55	2.8	250.0	3000	0.25	0.5	69.2
ZM4764A	100	95.00	105.00	2.5	350.0	3000	0.25	0.5	76.0

Typical Characteristics Curves


Fig.1-Power Derating Curve

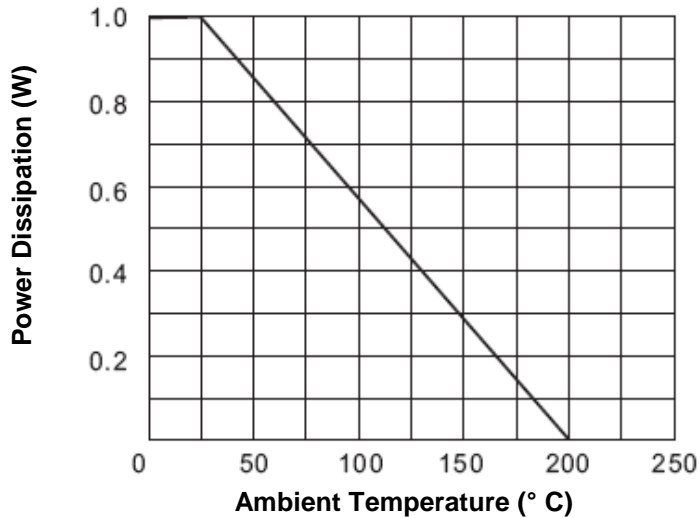


1.0W Surface Mount Zener Diodes

ZM4728A - ZM4764A

Fig.2-Breakdown Characteristics

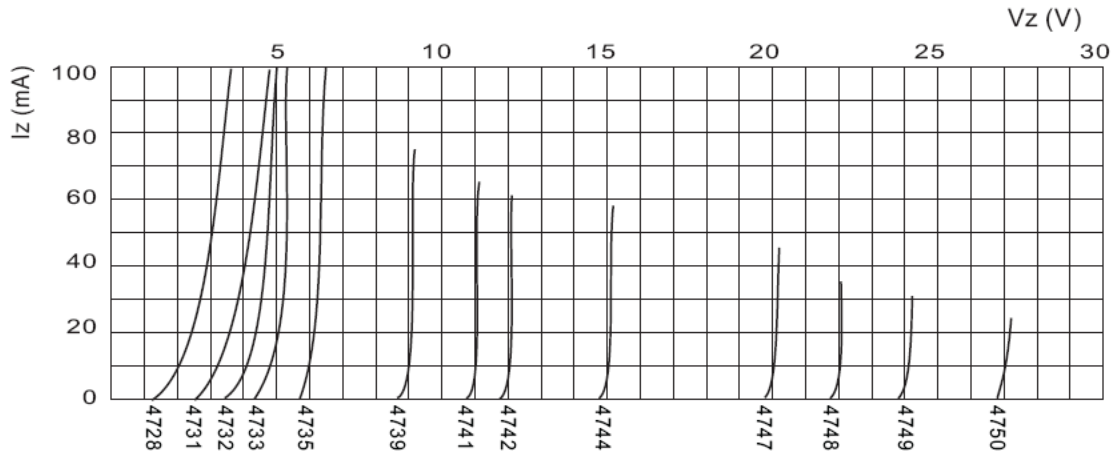

Dimensions in inch (mm)

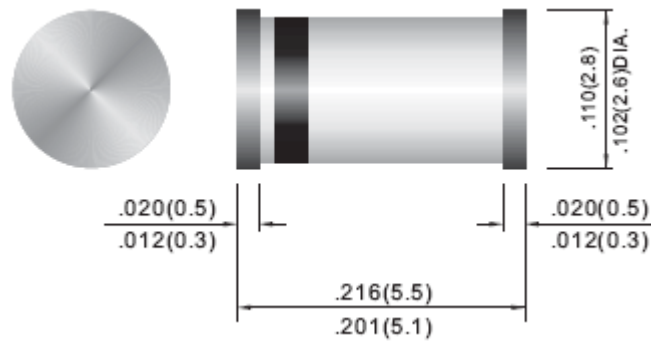


MELF

1.0W Surface Mount Zener Diodes

ZM4728A - ZM4764A

Ordering Information

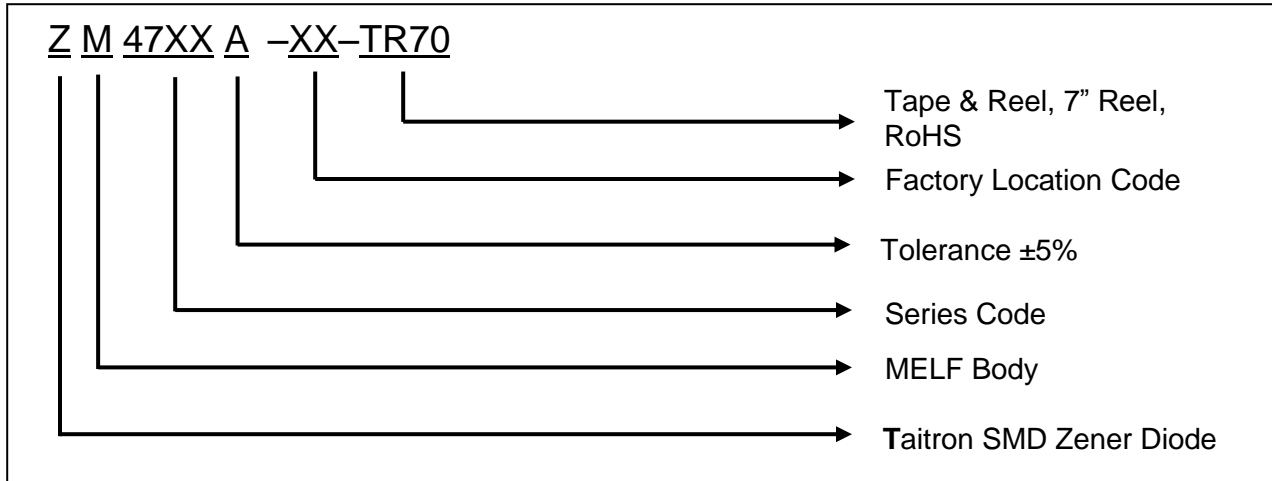

How to contact us

US HEADQUARTERS

28040 WEST HARRISON PARKWAY, VALENCIA, CA 91355-4162

Tel: (800)-TAITRON (800)-824-8766 (661)-257-6060

Fax: (800)-TAITFAX (800)-824-8329 (661)-257-6415

Email: taitron@taitroncomponents.com

Http://www.taitroncomponents.com

TAITRON COMPONENTS MEXICO, S.A .DE C.V.

BOULEVARD CENTRAL 5000 INTERIOR 5 PARQUE INDUSTRIAL ATITALAQUIA, HIDALGO

C.P. 42970 MEXICO

Tel: +52-55-5560-1519

Fax: +52-55-5560-2190

TAITRON COMPONENTS INCORPORATED TAIWAN, TAIPEI

6F., No.190, Sec. 2, Zhongxing Rd., Xindian Dist., New Taipei City 23146, Taiwan R.O.C.

Tel: 886-2-2913-6238

Fax: 886-2-2913-6239

TAITRON COMPONENT TECHNOLOGY, SHANGHAI CORPORATION

METROBANK PLAZA, 1160 WEST YAN'AN ROAD, SUITE 1503, SHANGHAI, 200052, CHINA

Tel: +86-21-5424-9942

Fax: +86-21-2302-5027