


6.0A Single-Phase Silicon Bridge Rectifier

Features

- High forward surge current capability
- Ideal for printed circuit board
- High temperature soldering guaranteed:
260°C/10 seconds/5 lbs. (2.3kg) tension
- RoHS Compliant



TB6



Mechanical Data

Case:	Molded plastic body
Epoxy:	Meets UL 94V-0 flammability rating
Terminals:	Lead solderable per MIL-STD-202E method 208C
Polarity:	Marked on case
Weight:	3.8 grams

Maximum Ratings & Electrical Characteristics ($T_{Ambient}=25^{\circ}C$ unless noted)

Symbol	Description	TB605	TB61	TB62	TB64	TB66	TB68	TB610	Unit	Conditions
VRRM	Maximum Repetitive Peak Reverse Voltage	50	100	200	400	600	800	1000	V	
VRMS	Maximum RMS Voltage	35	70	140	280	420	560	700	V	
VDC	Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	V	
IO(AV)	Maximum Average Forward Rectified Current	6.0							A	TA = 50 °C
IFSM	Peak Forward Surge Current	125							A	Note1
VF	Maximum Forward Voltage	1.0							V	IO=3A
IR	Maximum Reverse Current at Rated DC Blocking Voltage per element	5.0							uA	TA = 25 °C
		500								TA =100 °C
CJ	Typical junction capacitance	80							pF	Note 2
TJ	Operating Temperature Range	-55 to +125							°C	
TSTG	Storage Temperature Range	-55 to +150							°C	

6.0A Single-Phase Silicon Bridge Rectifier

TB605 - TB610

NOTES:

1. 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)
2. Measured at 1MHz and applied 4vDC reverse voltage

Typical Characteristics Curves

Fig.1- Derating Curve for Output Rectified Current

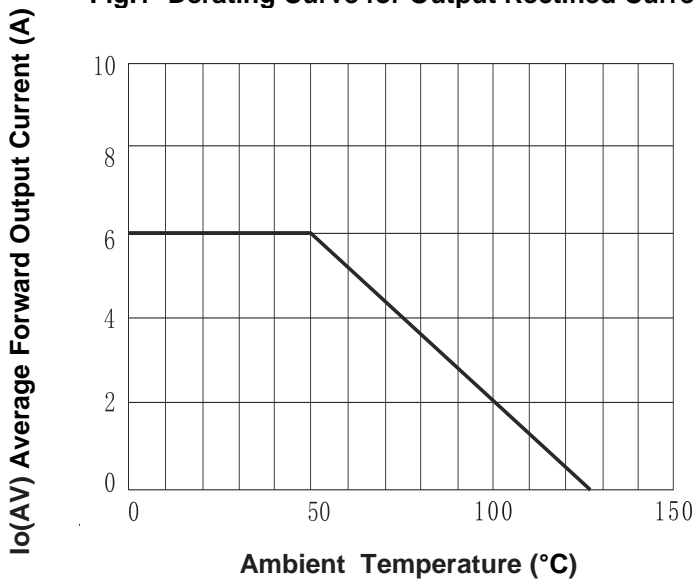


Fig.2- Maximum Non-Repetitive Peak Forward Surge Current Per Element

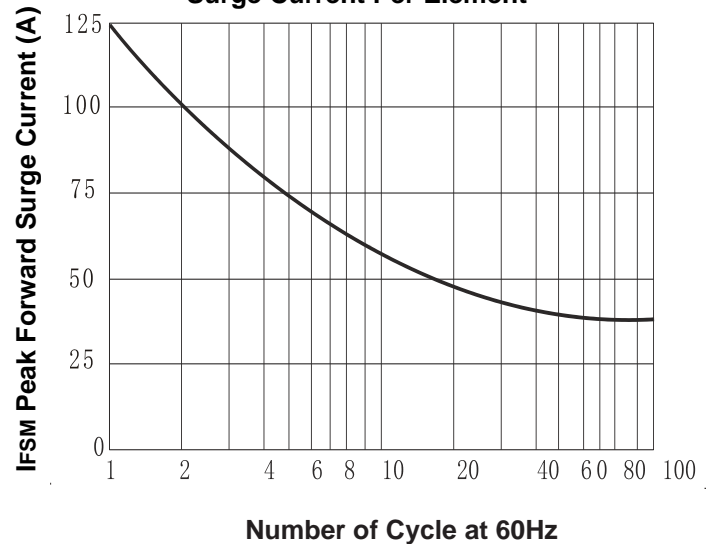


Fig.3- Typical Forward Characteristics Per Bridge Element


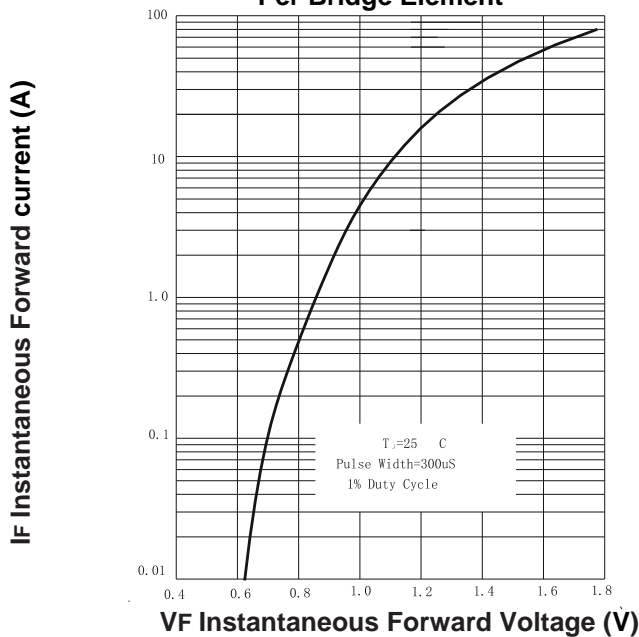



Fig.4- Typical Reverse Characteristics Per Bridge Element

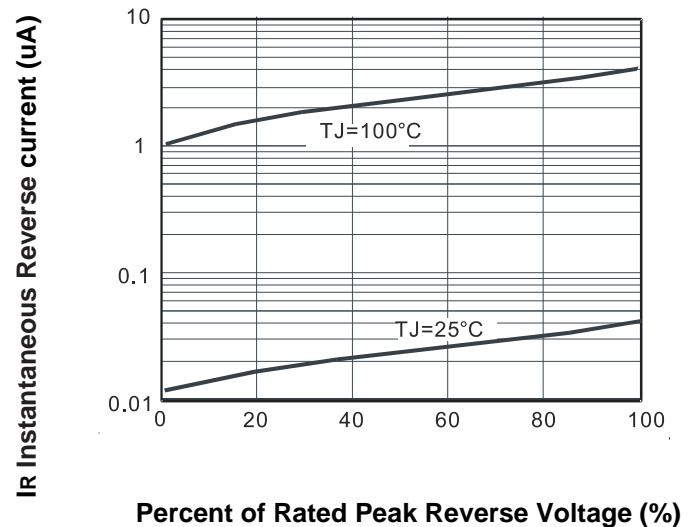



6.0A Single-Phase Silicon Bridge Rectifier

TB605 - TB610

Fig.5- Typical Junction Capacitance Per Bridge Element

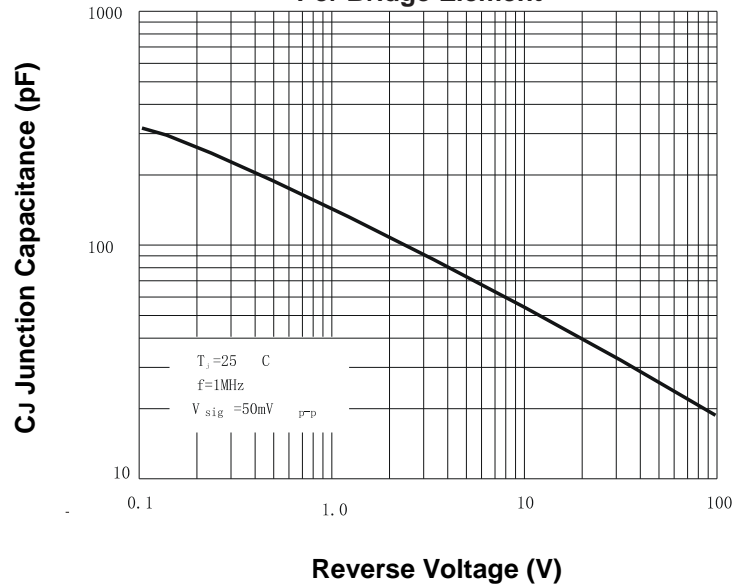

Dimensions in inch (mm)

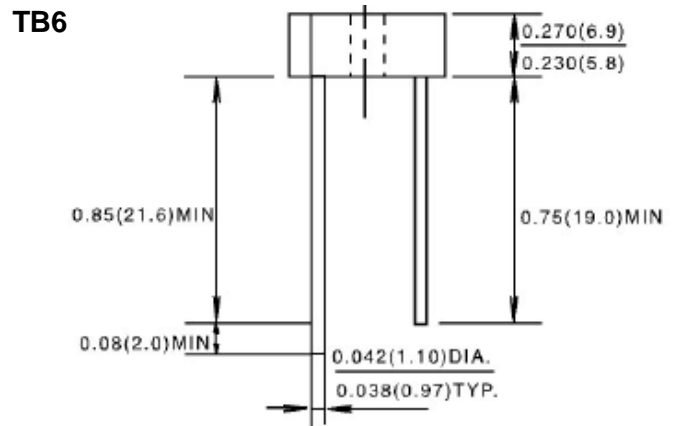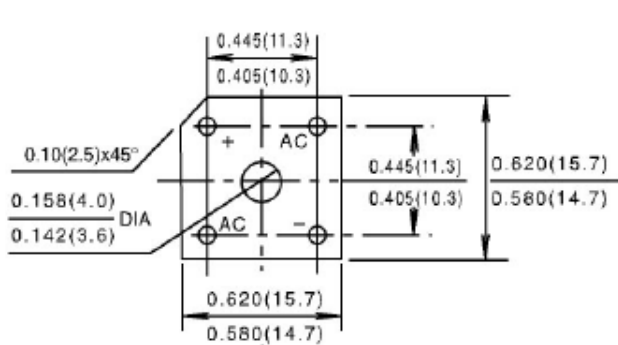

6.0A Single-Phase Silicon Bridge Rectifier

TB605 - TB610

How to contact us

USA HEADQUARTERS

28040 WEST HARRISON PARKWAY, VALENCIA, CA 91355-4162

Tel: (800)-TAITRON (800)-824-8766 (661)-257-6060

Fax: (800)-TAITFAX (800)-824-8329 (661)-257-6415

Email: taitron@taitroncomponents.com

Http://www.taitroncomponents.com

TAITRON COMPONENTS INCORPORATED TAIWAN BRANCH

6F., NO.190, SEC. 2, ZHONGXING RD., XINDIAN DIST., NEW TAIPEI CITY 23146, TAIWAN R.O.C.

Tel: 886-2-2913-6238

Fax: 886-2-2913-6239

TAITRON COMPONENT TECHNOLOG SHANGHAI CORPORATION

SUITE 1503, METROBANK PLAZA, 1160 WEST YAN'AN ROAD, SHANGHAI, 200052, CHINA

Tel: +86-21-5424-9942

Fax: +86-21-2302-5027